



Handwritten mark resembling a stylized 'A' or 'X'.

04/19/00

1c580 U.S.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.C14438

First Named Inventor or Application Identifier

MASATO OCHIAI

Express Mail Label No.

APPLICATION ELEMENTS

PTO

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages **54**

3. ☒ Drawing(s) (35 USC 113) Total Sheets **19**

4. ☒ Oath or Declaration Total Pages **2**

- a. ☒ Newly executed (original or copy)
b. ☐ Unexecuted for information purposes
c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 4c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514
(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

Country

State

Telephone

Zip Code

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	36-20 =	16	X \$ 18.00 =	\$288.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	8-3 =	5	X \$ 78.00 =	\$390.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$690.00
	Total of above Calculations =				\$1,368.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1,368.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 1,368.00 to cover the filing fee is enclosed.

21. ☒ A check in the amount of \$ 40.00 to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Leonard P. Diana (Reg. No. 29,296)
SIGNATURE	
DATE	April 18, 2000

DEVICE SEARCH SYSTEM

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates to a system for searching a device on a network.

Related Background Art

 Directly service has been provided so far as a method for efficiently finding various resources
10 (including a printer and a scanner) on a network to use them. The directly service is, so to speak, a telephone directory for a network, which is used to store various pieces of information. LDAP (Lightweight Directory Access Protocol) is a specific example of a
15 directory system. LDAP rules is described in RFC 1777 issued by IETF. By using the directory service and thereby searching a device connected to a network, it is possible to obtain a list of network addresses of devices usable on the network.

20 In the case of the above conventional art, however, when designating various attributes to search a device or when designating various attributes such as presence or absence of a staple function or presence or absence of double-sided screen print and searching a
25 device by using a network printer, only a device completely matching with search conditions including these attributes is searched and shown to a user.

Therefore, when a device completely matching with input search conditions is not present on a network, a problem occurs that re-search must be performed by re-inputting search conditions in which designation of attributes is moderated. Moreover, when a device completely matching with search conditions is not present in re-search, a problem occurs that it is necessary to perform search again by re-inputting search conditions in which designation of attributes is further moderated.

SUMMARY OF THE INVENTION

The present invention is made to solve the above problems and it is an object of the present invention to make it possible that when searching a device by designating various attributes as search conditions, a user can save the time for re-searching a desired device by re-inputting search conditions not only when a device completely matching with the search conditions is present on a network but also when the device is not present on the network.

Moreover, it is another object of the present invention to make it possible for a user to easily understand whether a displayed device meets any attribute when the search result is displayed.

To achieve the above objects, an embodiment of the present invention extracts an object-class attribute

out of search conditions designated by an operator and searches a device meeting the attribute and performs a process on whether the device obtained through the search has attributes of search conditions first
5 designated by the operator.

Other objects and features of the present invention will become more apparent from the following specification and drawings.

10 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration showing a configuration of a network in which the device search system of this embodiment can operate;

FIG. 2 is a block diagram showing a configuration
15 of device search server and a device search client;

FIG. 3 is an illustration showing an example of device information in a device search server;

FIG. 4 is a flow chart showing operations of a device search server;

20 FIG. 5 is a flow chart showing database search operations of a device search server;

FIG. 6 is an illustration showing indications on a device search screen before device search;

FIG. 7 is an illustration showing a search
25 condition in a device search client;

FIG. 8 is an illustration showing a search result output from a device search server;

FIG. 9 is a flow chart showing operations of a device search client;

FIG. 10 is a flow chart showing search request operations of a device search client;

5 FIG. 11 is a flow chart showing search-result display operations of a device search client;

FIG. 12 is an illustration showing indications on a device search screen after device search;

10 FIGS. 13, 14, 15 are flow charts showing operations of a device search server of a second embodiment;

FIG. 16 is a flow chart showing operations of a device search client of the second embodiment;

15 FIG. 17 is an illustration showing indications on a device search screen before device search in a third embodiment;

FIG. 18 is an illustration showing indications on the device search screen after device search in the third embodiment;

20 FIG. 19 is an illustration showing a corresponding map between device search attributes and device icons; and

FIG. 20 is an illustration showing a memory map in a storage medium of device search software of the third embodiment.

25

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention are described below by referring to the accompanying drawings.

<First embodiment>

FIG. 1 is an illustration showing a configuration of a network in which a device search system of this embodiment can operate. In FIG. 1, symbol 101 denotes a color printer, 102 denotes an MFP (Multi Function Peripheral: a copying machine also serving as a network printer), 103 and 104 denote monochromatic printers, and 105 denotes a scanner connected with a network. Symbol 111 denotes a desk-top-type computer (hereafter referred to as PC) and 113 denotes a notebook-type computer (hereafter referred to as notebook PC). These PCs can respectively execute a program of a device search server of this embodiment and they respectively output a device search request meeting a desired condition to a device search server as described later, receive a search result, and display the result on a display screen. Hereafter, a PC 111 and a notebook PC 113 capable of executing the program of the device search client are referred to as device search clients 111 and 113. Symbol 112 denotes a PC capable of executing a program of the device search client server of this embodiment, which stores information (database) for network devices 101 to 106 to be described later, receives an inquiry about device search from the device search client 111 or 113, and returns a result of the

inquiry. Hereafter, a PC 112 capable of executing a program of the device search server is referred to as device search server 112.

Among the above devices, 101, 102, 103, 111, 112, and 120 are set on the second floor and 104 and 105 are set on the first floor. Because the client 113 is a notebook PC, it is connected to LAN 100 from the first floor at present. However, the client 113 may be removed because of its portability. Moreover, the network 100 for connecting these devices each other is connected to Internet 130 through a fire wall 120 and moreover connected with other network 140 through Internet 130.

FIG. 2 is a block diagram showing a configuration of the search clients 111 and 113 and the search server 112, which comprises the same configuration as a general purpose personal computer. In FIG. 2, symbol 200 denotes the whole PC in which either of device search client software and device search server software (hereafter, they are referred to as device search software) works and the PC 200 is equivalent to 111, 112, or 113. The PC 200 is provided with a CPU 201 for executing device search software stored in a hard disk (HD) 211 or supplied from a floppy disk drive (FD) 212 to generally control each device connected to a system bus 204. Symbol 203 denotes a RAM that functions as a main memory or a work area of the CPU

201. Symbol 205 denotes a keyboard controller (KBC) to control an instruction input from a keyboard (KB) 209 or not-illustrated bonding device. Symbol 206 denotes a CRT controller (CRTC) to control indications on a CRT display (CRT) 210. Symbol 207 denotes a disk controller (DKC) to control the access with the hard disk (HD) 211 and floppy disk controller (FD) 212 for storing a boot program, various applications, an edition file, a user file, and a network control program. Symbol 208 denotes a network interface card (NIC) to bidirectionally transfer data to and from a network printer, other network unit, or other PC through a LAN 220. The LAN 220 is the same as the LAN 100 in FIG. 1.

15 Then, a configuration and operations of a device search server are described below.

FIG. 3 is an illustration showing a structure of a database for a network unit stored in the search server 112.

20 In the table in FIG. 3, each row denotes a network device. Each column denotes a device name (301), a network address (302) of a printer, an object class (303) showing a functional type of a device, a device type (304), whether to support color print (305),
25 whether to support double-sided print (306), or whether to support a staple (307).

In this case, an object class shows a functional

type of a device. For example, when a device is a printer, it is registered as a printer class (printer). Moreover, when a device has a print function, it can be registered as a printer-class device even if the device
5 is an MFP. Furthermore, a device type shows the general function of a device. In this case, a single printer is distinguished from an MFP. In symbols from 305 up to 307, symbol 1 denotes supporting and 0 denotes not supporting. Moreover, symbol NA denotes
10 that information for the attribute is not stored.

The data shown in FIG. 3 is specifically described by using devices registered in the first row as examples. The data denotes that a device referred to as Mr. COLOR is present in a network address
15 192.168.16.131, which has a print function, which is a single printer as a configuration, and which supports color print and stable as attributes but which does not support a double-sided print function. Moreover, in this embodiment, it is assumed that the devices from
20 the first to fifth rows shown in FIG. 3 correspond to 101, 102, 104, and 105 in FIG. 1. The information shown in FIG. 3 is an example to the last. It is needless to say that information to be stored in the search server 112 can be additional information
25 including a setting place and the like.

In this case, it is assumed that attributes to be controlled by database 300 for each device include an

indispensable attribute that must be registered without fail and an optional attribute that does not need to be always registered.

5 As for this embodiment, in the database shown in FIG. 3, it is assumed that the object class 303 is an indispensable attribute and the color print 305, double-sided print 306, and staple 307 are optional attributes.

10 Then, operations of the device search server 112 are described below by referring to flow charts in FIGs. 4 and 5. First, FIG. 4 is a flow chart for explaining operations of the device search server 112. Judgment and execution of a series of the processes are performed by the CPU 201 in the device search server by hardware. When the device search server 112 is
15 started, it first opens a receiving port for receiving a device search request from a device search client in step S401. When receiving the search request from the device search client through the above operation, an
20 operating system issues a reception event and reception of the search request is communicated to a program. Then, the server 112 starts step S402 to wait for any event to be communicated from the operating system. When any event is communicated, the server 112 obtains
25 the event and starts the next step. In the next step S403, the server 112 judges whether the event obtained in step S402 is a system shutdown event by a user. If

the vent is a shutdown event, the server 112 closes the receiving port in step S408 to end the program.

However, when it is judged that the event is not a shutdown event in step S403, the server 112 starts step

5 S404 to judge whether the event is an inquiry event from the device search client. If the event is an inquiry event, the server 112 starts step S405 to select a proper device by collating a search condition obtained through the event with the data base shown in
10 FIG. 3. In the next step S406, the server 112 returns a search result obtained in step S405 to the device search client. However, when it is judged that the event is not an inquired reception event in step S407, the server 112 starts step S407 to perform a process
15 other than the inquired reception event such as update of a display screen.

FIG. 5 is a flow chart for more minutely explaining the database search operation in step S405 in FIG. 4. The whole is briefly and roughly described
20 below. The database search step of this embodiment uses a system for processing a plurality of search conditions designated by a device search client one by one. This is an outside loop starting with step S501 and returning to step S501 again via the NO judgment.
25 An inside loop starting with step S504, exiting from the NO judgment, and returning to step S504 gain is used to scan all pieces of registered information in

the database about one search condition. The loop is described below in detail for each step. In the database search operation, it is judged whether all search conditions are already processed in step S501.

5 When all conditions are already processed, step S502 is started to return a search result to a host program. However, when it is judged in step S501 that not all search conditions are processed, step S503 is started to select one search condition out of the information
10 received from the device search client.

Then, the step S504 is started to judge whether the database 300 for the network device described for FIG. 3 is entirely scanned. When it is judged that scanning ends, step S501 is restarted to process the
15 next search condition. However, when it is judged in step S504 that scanning of the database 300 does not end, step S506 is started. In step S505, data for one device is selected out of the database 300. In the next step S506, it is judged whether the data selected
20 in step S505 matches a search condition. When the data matches the search condition, step S507 is started. However, when it is judged that the data selected in step S505 does not correspond to the search condition, step S504 is restarted to continuously process the next
25 device information registered in the database 300. In step S507, the device name 301, network address 302, device type 304, color 305, double-sided print 306, and

staple 307 are selected out of the device information which is judged in step S506 as matched with the search condition to add them to a search result in the next step S508. When step S508 ends, step S504 is
5 restarted to continue scanning of the next data.

Hereafter, for this embodiment, a case is described in which a client requests a device whose object class is a printer as a search condition. FIG. 8 shows a result of searching the database 300 in
10 accordance with the search condition. In FIG. 8, a search result 801 shows that there are four devices matching a condition that an object class is "printer" and pieces of information for device name 801, network address 802, device type 803, presence or absence of
15 color function 804, presence or absence of double-sided print function, and presence or absence of staple function are shown for each device.

Then, operations of a device search client are described below.

20 FIG. 6 is an illustration showing indications on a search screen in a search client before search is executed. Various pieces of information are displayed in a window 600. Symbol 601 denotes a COMBO box for designating an object class of a device to be searched.
25 By operating the COMBO box 601, it is possible to set an object class of a device to be searched to "printer" or "scanner". In this case, by changing the setting of

the object class, each attribute condition in an area 603 for designating a search attribute is changed to an attribute corresponding to a set object class.

Because a printer is selected in the area 603 for
5 designating a search attribute as an object class by
the COMBO box 601 in the case of the example in FIG.
10, attributes for a printer are shown by four check
boxes. That is, it is possible to designate a search
attribute by a check box 603a showing presence or
10 absence of a color print function, a check box 603b
showing presence or absence of a staple function, a
check box 603c showing presence or absence of a double-
sided print function, or a check box 603d showing
presence or absence of a sorter function.

15 In the case of the example shown in FIG. 6,
because the check box 603a showing presence or absence
of a color print function, check box 603b showing
presence or absence of a staple function, and check box
603c showing presence or absence a double-sided
20 function (each box is illustrated by a black square)
are respectively checked, search of a device capable of
performing color print, double-sided print, and staple
processing is requested.

Symbol 602 denotes a search start button. When a
25 user presses the button by using a keyboard 209 in FIG.
3 or a not-illustrated pointing device, whether there
is a device matching a search condition designated by

the attribute designation area 603 is inquired to the search server PC 112. Moreover, symbol 604 denotes an area for displaying a search result, in which a device-name displaying area 604a, an IP-address displaying area 604b, and areas 604c, 604d, 604e, and 604f for displaying presence or absence of each attribute of a searched device are included.

FIG. 7 is an illustration showing a search condition designated through the search screen in FIG. 6 and search condition data to be inquired of a device search server. Symbol 801 denotes a search condition designated by an operator, which is shown by a logical product of four attributes in the case of this example.

A device having an object-class printer (first line) as a first attribute, a color print function (second line) as a second attribute, a double-sided print function (third line) as a third attribute, and a stable function (fourth line) as a fourth attribute is designated.

Then, a method for extracting a second search condition to be inquired of a search server from a first search condition designated by an operator is described below.

As already described, attributes to be controlled by the database 300 for each device include an indispensable attribute which must be registered without fail and an optional attribute which does not

need to be always registered. As for this embodiment, the object class 303 is an indispensable attribute and the color print 305, double-sided print 306, and staple 307 are optional attributes.

5 Therefore, only an indispensable attribute is extracted from the first search condition designated by an operator to generate a second search condition to be inquired of a search server.

10 In the example in FIG. 7, an indispensable attribute is only the object class among search conditions 701 designated by an operator. Therefore, a search condition 702 to be inquired of a device search server is generated.

15 FIG. 9 is a flow chart showing operations of the device search clients 111 and 113. It is also possible to execute a program of a device search client on the device search server 112. First, rough operations of the program of the device search client are described below. The program waits an event until a system ends
20 and when an event occurs, operates as an event-driving-type program for processing the event. Main events include a system ending event, a device search requesting event, and a device search result event receiving event. Hereafter, each step is described in
25 detail.

 When a search client is started, the client first waits in step S901 until an event occurs. When an

event occurs, the client obtains the event and starts
step S902. In step S902, it is judged whether the
event obtained in step S901 is an event generated
because a user issues a system-ending command by using
5 the keyboard 209 or a not-illustrated pointing device.
If it is judged that the user issues the ending
command, the program ends. However, when it is judged
in step S902 that the event is not an ending-command
issuing event, step S903 is started. In step S903, it
10 is judged whether the event obtained in step S901 is
generated because the user issues a device searching
command by selecting a search menu 701. When the event
is an event generated because a device search command
is issued, step S904 is started to transmit a device
15 search request to the device search server 112.
However, when it is judged in step S903 that the event
is not an event generated because the device search
command is issued, step S905 is started. In step S905,
it is judged whether the event obtained in step S901 is
20 an event due to reception of an answer of a search
result from the device search server 112 to the device
search request transmitted in step S904. When it is
judged that the event is an event due to reception of
the answer, step S906 is started to display the
25 received search result on a window 700. When the
process in step S906 ends, step S901 is restarted to
wait for the next event.

However, when it is judged in step S905 that the event is not an event due to reception of the answer, step S907 is started to perform other process. The other process includes, for example, re-drawing a
5 screen when a program is started or a user moves a window on a screen. When step S907 ends, step S901 is restarted to wait for the next event.

FIG. 10 is a flow chart explaining the search request operation S904 in detail in the flow chart in
10 FIG. 9. First, in step S1001, the RAM 203 is accessed to obtain previously-stored search conditions as shown in FIG 8. IN the next step S1002, only a condition about an object class is extracted from the search conditions and transmitted to the search server 112 to
15 request search of a network device.

It is assumed that an address of a device search server is previously known by writing a value input by a user through the keyboard 209 in the hard disk 211 and reading the value. However, the address is not
20 restricted to the above case. As other method, it is also permitted to obtain the address from a network by using a technique such as a double space in a programming language Linda.

FIG. 11 is a flow chart explaining the search result displaying operation S906 in the flow chart in
25 FIG. 9 in detail. In the search result displaying operation, a received search result is checked in step

S1101 to judge whether there is a device completely corresponding to a search condition temporarily stored in the RAM 203. When there is only one device completely matching the search condition, step S110 is started. In step S1102, a screen is rewritten by operating the CRTC 206 to display that the device completely matching the search result displaying area 705. In the next step S1103, TRUE is substituted for a temporary variable fExist showing whether the device completely matching the area 705 in order to store that the device completely matching the area 705. When the process in step S1103 ends, step S1106 is started. In step S1101, when there is not any device completely matching the condition, step S1104 is started. In step 1104, the screen is written by operating the CRTC 206 to display that the device incompletely matches the search result displaying area 705. In the next step S1105, FALSE is substituted for the temporary variable fExit in order to store that the device incompletely matches the area 705. When the process in step S1105 ends, the flow joins step S1106.

A loop returning to step S116 from step S1106 through the NO judgment is a loop for processing all pieces of device information included in a received search result (search result 801 shown in FIG. 8 (that is, a loop for judging whether the pieces of device information and displaying them one by one in order)).

In step S1106, it is judged whether all pieces of device information included in a received search result are already processed. When it is judged that all pieces of device information are already processed, the whole process is completed. In step S1106, however, if it is judged that not all received pieces of information are processed, step S1107 is started to select one piece of information out of one received piece of information or more. In the next step S1108, process is divided depending on whether the value of fExist substituted in the previous step S1103 or S1105 is TRUE or FALSE. When fExist is TRUE, that is, there is a device completely matching the condition, step S1109 is started. However, because there are some devices not completely matching the search condition in received device information, only device information completely matching the condition is sorted from the device information. The sorting is performed in step S1109. In step S1109, it is judged whether the device information obtained in step S1107 completely meets the search condition 801 temporarily stored in the RAM 203. When the information completely meets the condition 801, step S1110 is started. In step S1110, the CRTC 206 is controlled to rewrite the screen and display a device name, a network address, and the fact that the device information completely matches the condition 801 in the device information displaying area 704. When

the process in step S1110 is completed, step S1106 is restarted to process the next device information. However, when it is judged in step S1109 that the device information does not completely match the condition 801, step S1106 is quickly restarted without performing the display process in step S1110.

Then, the process when fExit is FALSE In step S1108 is described below. When fExit is FALSE in S1108, step S1111 is started. In this case, various pieces of information from information not completely matching the search condition 801 except that an object class matches the condition 801 up to information one step before complete matching are included in a received search result. It is preferable to select only information as important as possible out of these pieces of information and display the information for a user. The judgment for that is performed in step S1111. In this case, "matching in a certain criterion or more" is judged when information matches two conditions or more among three designate conditions (presence of color, presence of both sides, and presence of staple), that is N-1 conditions among N conditions. Moreover, it is needless to say that it is permitted to properly set a matching-condition criterion such as N-2 or N-3 conditions.

In step S1111, it is judged whether the device information obtained in step S1107 meets two attributes

or more out of three attributes (presence of color,
presence of both sides, and presence of staple) of the
search condition 801. If it is judged that the
information meets two attributes or more, step S1112 is
5 started. In step S1112, attributes not met by the
information are checked. In the next step S1113, the
CRTC 206 is controlled to update the screen and display
a printer name and a network address out of the
information obtained in step S1107 and conditions
10 (attributes) unmatched in step S1112. When the process
in step S1113 is completed, step S1106 is restarted to
continue the next information process. However, when
it is judged in step S1111 that the information does
not meet two attributes or more, step S1106 is
15 restarted.

FIG. 12 is an illustration specifically showing
screen indications of search results displayed on the
search client PCs 111 and 113 after the device search
process is ended by the search server PC 112. As
20 described above, this embodiment shows a result of
using a printer as an object class and searching a
device having a color print function, a double-sided
print function, and a staple function.

Therefore, in this case, it is displayed in the
25 device-name displaying area 604a that there are four
devices each of whose object classes is a printer and
their names are "Mr. Color", "Second-floor high-speed

machine", "Development room printer", and "First-floor printer".

Moreover, presence or absence of attributes designated as search conditions for each device displayed as a search result are displayed in attribute presence/absence displaying areas 604c, 604d, and 604e. In the attribute presence/absence displaying areas 604c to 604e, symbol "o" denotes supporting the function and symbol "-" denotes not supporting the function.

In this case, the example in FIG. 12 shows a case in which there is not any device completely matching a search condition. However, when there is a device completely matching a search condition, it is displayed on the search screen 600 that a device completely matching a search condition is found.

Thus, according to the first embodiment, it is possible to make a user easily understand that a searched device meets which attribute or does not meet any attribute even if the device does not completely match a search condition and save the time for the user to search a desired device again by moderating a search condition.

<Second embodiment>

In the case of the above first embodiment, the second search condition to be inquired of a search server is extracted from the first search condition designated by an operator at the search client side.

In the case of the second embodiment, a second search condition to be inquired of a search server is extracted from a first search condition designated by an operator at the search server side.

5 That is, when a device matching the first search condition is not present as a result of executing search in accordance with the first search condition, the search server extracts the second search condition, executes re-search, and return the result to a search
10 client.

FIG. 13 is a flow chart showing the general process for device search performed by a search server PC 112. Judgment and execution of a series of the processes are performed by a CPU 201 in the search
15 server PC 112 through hardware. The search server PC 112 operates in accordance with an event-driving-type program. That is, when any event occurs, the server PC 112 analyzes the event and executes a corresponding process. As for the following example, a case is
20 described in which an operation is performed in accordance with a device search request sent from a search client PC 111.

When the search server PC 112 is started, it first opens a receiving port in order to receive a device
25 search request from a search client PC 111 or 113 in step S1301. According to the above operation, when receiving a device search request from, for example,

the search client PC 111, the operating system of the search server PC 112 issues a reception event and it is communicated to a device search program that the device search request is received.

5 Then, step S1302 is started to wait for any event to be communicated from the operating system. When any even is communicated, the server PC 112 obtains the event and starts the next step S1303. In step S1303, the server PC 112 judges whether the obtained event is
10 an end command, that is, a system shutdown event by a user. When the obtained event is a shutdown event as a result of the above judgment, the server PC 112 closes the receiving port in step S1309 and thereafter, ends the process of the device search program.

15 When the server PC 112 judges in step S1303 that the obtained event is not a shutdown event, it starts step S1304 to judge whether the obtained event is an inquiry reception event sent from a search client PC. In this case, when the obtained event is an inquiry
20 reception event, the server PC 112 starts step S1305, retrieves a search condition from a receiving packet, and stores the packet in a memory such as the RAM 203 shown in FIG. 3.

 Moreover, the server PC 112 stars step S1306,
25 collates the database 300 in FIG. 3 with a search condition inquired from the search client PC 111, and selects a proper device. Details of a device search

process using the database 300 is described later by referring to FIG. 14. In the next step S1307, the server PC 112 returns a search result obtained through the database search process in step S1306 to the search client PC 111.

Moreover, in step S1304, the server PC 112 judges that the obtained event is not an inquiry reception event, it starts step S1308 to perform processes other than processes of a shutdown event and inquiry reception event such as a process for updating a screen and a process for registering network address information and attribute information received from network devices 101 to 105 in the database 300 shown in FIG. 3.

Then, the device search process performed by the search server PC 112 in step S1306 in FIG. 13 is more minutely described below by referring to the flow chart in FIG. 14. First, the outline of the general process is described below. In the case of the device search process of this embodiment, when the search client PCs 111 and 113 designate a plurality of search conditions, these search conditions are processed one by one. This is an outside loop judged in step S1401. Moreover, an inside loop judged in step S1404 is used to scan all pieces of registered device information in the database 300 about a certain search condition.

In the case of the device search process of this

embodiment, it is first judged in step S1401 whether all search conditions stored in a memory such as the RAM 203 are already processed in step S1401. As a result, when it is judged that all search conditions in the memory are already processed, step S1402 is started to execute a re-search process. The re-search process is described later.

However, it is judged in step S1401 that not all search conditions in the memory are processed yet, step S1403 is started to retrieve one unprocessed search condition from all search conditions stored in the memory. Then, step S1404 is started to judge whether all pieces of registered device information in the data base 300 are already searched. When all pieces of registered device information are already searched as a result of the above judgment, step S1401 is restarted to process the next search condition.

Moreover, in step S1304, when it is judged that not all pieces of registered device information in the database 300 in FIG. 3 are searched, step S1405 is started. In step S1305, registered device information for the n-th device is retrieved from the database 300. Then, in the next step S1406, it is judged whether the retrieved registered device information matches a currently-purposed search condition.

When the retrieved registered device information does not match the search condition as a result of the

above judgment, step S1404 is restarted (in this case, the value of n is incremented), the next device information registered in the database 300 is continuously searched. However, when the retrieved
5 registered device information matches the search condition as a result of the judgment in step S1406, step S1407 is started.

In step S1407, pieces of information for the device name 301, network address 302, device type 304
10 and moreover, color print function attribute 305, double-sided print function attribute 306, and staple function attribute 307 are obtained out of the registered device information which is judged as matching the search condition in step S1406. Then, in
15 the next step S1408, the obtained pieces of information are added to search result information. When the process in step S1408 is ends, step S1404 is restarted to continuously search the next device information registered in the database 300.

20 Thus, when searching all pieces of device information registered in the database 300 shown in FIG. 3, every piece of device information completely matching each search condition is detected every search condition. Then, after every piece of device
25 information is re-searched in step S1402, it is returned to a host program in step S1409 and returned to the search client PC 111 hitherto outputting a

device search request in step S1307 in FIG. 13.

Then, operations when the search server PC 112 performs re-search are described below by referring to the flow chart in FIG. 15.

5 In FIG. 15, first in step S1601, it is judged whether a device completely matching a search condition sent from the search client PC 111 stored in the memory in step S1305 (device meeting all search attributes) is found when executing the database search process shown
10 in FIG. 14 in accordance with the search condition.

 In this case, when it is judged that the device completely matching the search condition received from the search client PC 111 is found, the process ends without doing anything because the device matching the
15 search condition is already communicated to the search client PC 111 in step S1307 in FIG. 13. However, when a device matching the search condition received from the search client PC 111 is not found, step S1502 is started to extract only the information for an object
20 class out of a search condition stored in a memory such as the RAM 203 and replace the search condition with the object class.

 Then, step S1503 is started to execute the database search process shown in FIG. 15 again in
25 accordance with the database 300 shown in FIG. 15 and end the process.

 Thus, according to the second embodiment, it is

possible to make a user easily understand that a searched device meets which attribute or does not meet any attribute even if the device does not completely match a search condition and a user can save the time
5 for performing re-search by moderating a search condition in order to search a desired device.

Moreover, because re-search is executed by extracting a second search condition from a first search condition designated by an operator at the
10 search-server side, it is possible to univocally control the extraction process at the server side.

<Third embodiment>

For the first embodiment, a case is described in which search results are displayed in the form of a
15 list. A case of understandably displaying search results with icons is described as the third embodiment.

FIG. 17 shows an example of screen display of device search clients 111 and 113 before searching a
20 device. In FIG. 17, various pieces of information are displayed in a window 1700 in which symbol 1701 denotes a COMBO box for designating an object class of a device to be searched. By operating the COMBO box through a keyboard 209 or a not-illustrated pointing device, it
25 is possible to set an object class of a device to be searched to "printer" or "scanner". Symbol 1702 denotes a search start button. When a user presses the

button through the keyboard 209 or not-illustrated pointing device, whether a matched device is present is inquired to a device search server 112. Symbol 1703 denotes an area for designating a search attribute (hereafter referred to as attribute area 1703). Because an object class is set to a printer by the COMBO box 1701, an attribute for the printer is displayed in the attribute area 1703 as an icon. In this case, when a scanner is set by the COMBO box 1701, an attribute for the scanner is displayed in the attribute area 1703 as an icon. The following attributes are displayed as icons in the attribute area 1703 of this example so that a user can designate them: whether double-sided print can be made (1703a), whether a sorter function is present (1703b), whether a staple can be used (1703c), whether a mail box function is present (1703d), Z-type-out can be output, and color print can be made (1703f). The example in FIG. 17 shows a state in which attributes of the staple 1703c and color 1703f are selected and shows that each attribute is selected by displaying the attribute as an indication having a cubic sense as if a button is pressed. Symbol 1704 denotes an area for displaying search results, in which a device name 1704a, an IP address 1704b, and details 1704c other search results are displayed.

FIG. 19 is an illustration showing a corresponding

map between search results and icons. Symbol 1901 denotes an icon showing that a printer whose attribute is completely matched is found, 1908 denotes an icon showing a printer whose attribute is locally matched, which is displayed in the area 1704a together with a device name. In this case, an icon 1901 and an icon 1908 have the same printer shape and the color and density of the icon 1908 are made thinner than those of the icon 1901 so that a user can more easily understand them. Symbols 1902 to 1907 are icons showing matched attributes showing double-sided print, staple, sorter, mail box, Z-type out, and color print in order which are displayed in the area of search-result details 1704c. Moreover, the icons 1902 to 1907 use the same attribute icons shown in the attribute area 1703 in FIG. 17 so that a user can intuitively understand a search result.

FIG. 16 is a flow chart for explaining search-result displaying operations of a search client.

First, in step S1601, the number of attributes to be searched is obtained from a search condition temporarily stored in the RAM 203.

An example of this embodiment uses three attributes to be search (color function, staple function, and double-sided function).

In step S1602, it is judged whether all search results are processed. When all search results are

processed, step S1611 is started. In step S1611, the final display process is performed so as to be understandable for a user. For example, the final process is a process for reconfiguring indications on the display screen 1704 so that devices are arranged starting with a device having the most matched attributes.

When an unprocessed search result is present in step S1602, step S1603 is started to obtain the information for one device from a search result. In step S1604, the device name 704a and IP address 704b are displayed in accordance with the information. In step S1605, it is judged whether all attributes of a search condition stored in the RAM 203 are already processed. When all attributes are already processed, step S1602 is restarted to process the next device information. An attribute is obtained from the search condition in step S1606 and it is judged in step S1607 whether the attribute matches an attribute of a device obtained from a search result. When the former matches the latter, an attribute icon corresponding to the matched attribute is displayed in the area 1704c of a device currently processed as the display process when matched in step S1608.

In step S1609, a counter for counting the number of matched attributes set to the RAM 203 for each device is incremented. The counter is used to display

devices so that the devices are arranged starting with
a device having the most matched attributes in the
final display process in step S1611. When the
attributes are not matched each other in step S1607,
5 attribute icons corresponding to the attributes are not
displayed. According to the above operations, it is
possible to display which attribute matches an
attribute of a search condition and which attribute
does not match it as a list and make a user easily
10 understand a search result.

FIG. 18 shows results thus processed. According
to FIG. 18, it is shown that four devices are found.
In the case of a device "Mr. Color", a staple icon 1903
showing presence of a staple function and a color icon
15 1907 showing presence of a color function are displayed
in the area 1704c. From this, it is found that the
device has both the staple function and color print
function.

Moreover, because the two attributes are the whole
20 of the search condition, the icon 1901 showing that the
attributes are completely matched each other is
displayed in the area 1704a. In the case of "second-
floor high-speed machine" and "development room
printer", only the staple icon 1903 is displayed in the
25 area 1704c. Moreover, the machine and the printer are
not provided with the color print function of the
search condition. Therefore, the icon showing that

attributes are locally matched is displayed in the area 1704a. The device "first-floor printer" is a search condition because no icon is displayed in the area 1704c. Because neither color print function nor staple function are provided and only a condition that an object class is a printer is matched, the icon 1908 showing that attributes are locally matched is displayed in the area 1704a.

Thus, according to the third embodiment, because a result for each attribute data of a search condition designated by a user is displayed in the form of an icon, an operator can intuitively understand matched attribute data and unmatched attribute data.

It is also permitted that a network device control program of the present invention is executed by the PC 200 in accordance with an externally installed program. Moreover, the present invention can be applied to a case in which the program is supplied to the PC 200 by loading an information group including a program on the PC 200 from an external storage medium by a storage medium such as a CR-ROM, flash memory, or floppy disk or through a network for electronic mail or personal-computer communication.

FIG. 20 is a memory map of a storage medium storing a program of the present invention, in which it is assumed to use a CD-ROM as the storage medium. Symbol 9999 denotes an area storing directory

information, which shows positions of an area 9998 storing subsequent install programs and an area 9997 storing a network device control program. The area 9998 is an area storing install programs. The area 5 9997 is an area storing a network device control program. When a network control program of the present invention is installed in the PC 200, an install program stored in the area 9998 storing an install program is loaded in a system and executed by the CPU 10 201. Then, the install program executed by the CPU 201 reads a network device control program from the area 9997 storing the network device control program and stores the program in the hard disk 211.

It is permitted to apply the present invention to 15 a system comprising a plurality of units (such as host computer, interface unit, and reader), an integrated apparatus, or an apparatus comprising one unit.

Moreover, it is needless to say that an object of the present invention can be achieved when a storage 20 medium storing a program code of the software for realizing functions of the above embodiments is supplied to a system or apparatus and the computer (or CPU or MPU) of the system or apparatus reads the program code from the storage medium.

25 In this case, the program code read out of the storage medium realizes a new function of the present invention and the storage medium storing the program

code constitutes the present invention. A storage medium for supplying a program code can use any one of a floppy disk, hard disk, optical disk, photomagnetic disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory card, and ROM.

Moreover, by executing a program code read by a computer, functions of the above embodiments can be realized and moreover, realized when an OS working on the computer performs a part or the whole of an actual process in accordance with the program code.

Furthermore, functions of the above embodiments can be realized when a program code read out of a storage medium is written in a memory provided for a function extending board inserted into a computer or a function extending unit connected to the computer and then, a CPU provided for the function extending board or function extending unit performs a part or the whole of an actual process.

Furthermore, it is needless to say that the present invention can be applied to a case of allotting a program from a storage medium storing a program code of the software for realizing functions of the above embodiments to a requester through a communication line for personal-computer communication.

WHAT IS CLAIMED IS:

1. A device search system comprising a server unit for controlling a database in which information for identifying a device on a network and information for various attributes of the device are registered and for executing the search of the device in accordance with a search request, and a client unit for outputting the search request to the server unit, said client unit comprising:
 - 10 first generation means for generating a first condition designating one or more attributes in order to search a desired device on the network,
second generation means for extracting a certain attribute from the first condition to generate a second condition,
 - 15 search means for requesting the server unit to search in accordance with the second condition to obtain the information for a device matching the second condition as a result of the above search,
 - 20 first control means for sorting and outputting only the information for the device matching the first condition as first result information in accordance with the obtained search result, and
second control means for outputting the
25 information for the device matching the second condition as second result information in accordance with the obtained search result and the information

showing presence or absence of each attribute
designated by the first condition for each device.

2. The device search system according to claim 1,
5 wherein

device attributes controlled by the database
include an indispensable attribute to be registered
whenever a device is registered in the database and
attributes other than the indispensable attribute, and
10 the second generation means extracts only the
indispensable attribute from attributes designated by
the first condition to generate the second condition.

3. The device search system according to claim 2,
15 wherein the client unit further comprises;

third control means for selectively outputting the
first result information or the second result
information in accordance with a predetermined
condition.

20 4. The device search system according to claim 3,
wherein

the third control means outputs the first result
information when a device to be output as the first
25 result information is present and outputs the second
result information when a device to be output as the
first result information is not present.

5. The device search system according to claim 2,
wherein

the client unit further comprises storage means
for storing symbol information corresponding to an
5 attribute which can be designated by the first
condition, and

when the second result information is output and
when the information showing presence or absence of
each attribute designated by the first condition
10 output, presence or absence of each attribute is shown
in accordance with a display mode of the symbol
information corresponding to each attribute.

6. A system including a client unit for
15 requesting search of a device on a network and a server
unit for executing search of the device in accordance
with a search request from the client unit, wherein the
server unit comprises;

control means for controlling a database in which
20 the information for identifying a device on the network
and the information for various attributes of the
device are registered,

reception means for receiving a first condition
designating one or more attributes in order to search a
25 desired device on the network from the client unit,

generation means for extracting a certain
attribute from the first condition and generating a

second condition,

first search means for searching a device matching the first condition from the database and outputting first result information, and

5 second search means for searching a device matching the second condition from the database and outputting second result information.

10 7. The system according to claim 6, wherein attributes of a device controlled by the database include an indispensable attribute registered whenever a device is registered in the database and attributes other than the indispensable attribute, and
the generation means extracts only the
15 indispensable attribute designated by the first condition and generates the second condition.

8. The system according to claim 7, wherein the server unit further comprises;
20 control means for selecting the first result information or the second result information in accordance with a predetermined condition and returning the information to the client unit.

25 9. The system according to claim 8, wherein the control means returns the first result information to the client unit when a device to be

output as the first result information is present and returns the second result information to the client unit when the device to be output as the first result information is not present.

5

10. A device search system for requesting a server unit for controlling a database in which information for identifying a device on a network and information for various attributes of the device are registered to search the device and processing a search result, comprising:

first generation means for generating a first condition designating one or more attributes in order to search a desired device on the network;

15 second generation means for extracting a certain attribute from the first condition and generating a second condition;

20 search means for outputting a search request to the server unit in accordance with the second condition and obtaining information for a device matching the second condition as a search result;

25 first control means for sorting and outputting information for only a device matching the first condition as first result information in accordance with the obtained search result; and

second control means for outputting information for a device matching the second condition and

information showing presence or absence of each attribute designated by the first condition for each device.

5 11. The device search system according to claim 10, wherein

attributes of a device controlled by the database include an indispensable attribute registered whenever a device is registered in the database and attributes
10 other than the indispensable attribute, and

the second generation means extracts only the indispensable attribute from attributes designated by the first condition and generates the second condition.

15 12. The device search system according to claim 11, further comprising:

third control means for selectively outputting the first result information or the second result information in accordance with a predetermined
20 condition.

13. The device search system according to claim 12, wherein

the third control means outputs the first result
25 information when a device to be output as the first result information is present and outputs the second result information when the device to be output as the

first result information is not present.

14. The device search system according to claim 11, further comprising:

5 storage means for storing symbol information corresponding to an attribute which can be designated by the first condition, wherein

when the second result information is output and when information showing presence or absence of each
10 attribute designated by the first condition is output, presence or absence of each attribute is shown in accordance with a display mode of the symbol information corresponding to each attribute.

15 ~~15.~~ A device search system for executing device search in accordance with a search request from a client unit for requesting search of a device on a network, comprising:

control means for controlling a database in which
20 information for identifying the device on the network and information for various attributes of the device are registered;

reception means for receiving a first condition designating one or more attributes in order to search a
25 desired device on the network from the client unit;

generation means for extracting a certain attribute from the first condition and generating a

second condition;

first search means for searching a device matching the first condition out of the database and outputting first result information; and

5 second search means for searching a device matching the second condition from the database and outputting second result information.

10 16. The device search system according to claim 15, wherein

attributes of a device controlled by the database include an indispensable attribute registered whenever a device is registered in the database and attributes other than the indispensable attribute, and

15 the generation means extracts only the indispensable attribute from attributes designated by the first condition and generating the second condition.

20 17. The device search system according to claim 16, further comprising:

control means for selecting the first result information or the second result information in accordance with a predetermined condition.

25

18. The device search system according to claim 17, wherein

the control means returns the first result
information to the client unit when a device to be
output as the first result information is present and
returns the second result information to the client
5 unit when a device to be output as the first result
information is not present.

19. A device search method for requesting a
server unit for controlling a database in which
10 information for identifying a device on a network and
information for various attributes of the device are
registered to search a device and processing a result
of the search, comprising the steps of:

generating a first condition designating one or
15 more attributes in order to search a desired device on
the network;

extracting a certain attribute from the first
condition and generating a second condition;

requesting the server unit to perform search in
20 accordance with the second condition and obtaining
information for a device matching the second condition
as a result of the search;

sorting and outputting only information for a
device matching the first condition as first result
25 information in accordance with the obtained search
result; and

outputting the information for the device matching

the second condition and information showing presence or absence of each attribute designated by the first condition for each device.

5 20. The device search method according to claim 19, wherein

attributes of a device controlled by the database include an indispensable attribute registered whenever a device is registered in the database and attributes
10 other than the indispensable attribute, and

only the indispensable attribute is extracted from attributes designated by the first condition when the second condition is generated.

15 21. The device search method according to claim 20, further comprising the step of:

selective outputting the first result information or the second result information in accordance with a predetermined condition.

20

22. The device search method according to claim 21, wherein
the first result information is output when a device to be output as the first result information is present
and the second result information is output when the
25 device to be output as the first result information is not present.

23. The device search method according to claim 20, further comprising the step of:

controlling symbol information corresponding to an attribute which can be designated by the second result
5 information, wherein

when the second result information is output and
when information showing presence or absence of each
attribute designated by the first condition is output,
presence or absence of each attribute is shown in
10 accordance with a display mode of symbol information
corresponding to each attribute.

~~24.~~ A device search method for searching a device
in accordance with a search request from a client unit
15 for requesting search of a device on a network,
comprising the steps of:

controlling a database in which information for
identifying a device on the network and information for
various attributes of the device are registered;

20 receiving a first condition designating one or
more attributes in order to search a desired device on
the network from the client unit;

extracting a certain attribute from the first
condition and generating a second condition;

25 searching a device matching the first condition
from the database and outputting first result
information; and

searching a device matching the second condition
and outputting second result information.

25. The device search method according to claim
5 24, wherein

attributes of a device controlled by the database
include an indispensable attribute registered whenever
a device is registered in the database and attributes
other than the indispensable attribute, and

10 only the indispensable attribute is extracted from
attributes designated by the first condition when the
second condition is generated.

26. The device search method according to claim
15 25, further comprising the step of:

the first result information or the second result
information is selected in accordance with a
predetermined condition and returned to the client
unit.

20

27. The device search method according to claim
26, wherein

the first result information is returned to the
client unit when a device to be output as the first
25 result information is present, and

the second result information is returned to the
client unit when the device to be output as the first

result information is not present.

28. A storage medium storing a computer program
to be executed by a computer of a device search system
5 for requesting a server unit for controlling a database
in which information for identifying a device on a
network and information for various attributes of the
device are registered to search a device and processing
a result of the search, wherein the program comprises
10 the steps of;
- generating a first condition designating one or
more attributes in order to search a desired device on
the network;
 - 15 extracting a certain attribute from the first
condition and generating a second condition;
 - requesting server unit to perform search in
accordance with the second condition and obtaining
information for a device matching the second condition
as a result of the search;
 - 20 sorting and outputting only information for a
device matching the first condition as first result
information in accordance with the obtained search
result; and
 - outputting information for the device matching the
25 second condition as second result information and
information showing presence or absence of each
attribute designated by the first condition for each

device in accordance with the obtained search result.

29. The storage medium according to claim 28,
wherein

5 attributes of a device controlled by the database
include an indispensable attribute registered whenever
a device is registered in the database and attributes
other than the indispensable attribute, and

10 only the indispensable attribute is extracted from
attributes designated by the first condition when the
second condition is generated.

30. The storage medium according to claim 29,
wherein the computer program further comprises the step
15 of;

selectively outputting the first result
information or the second result information in
accordance with a predetermined condition.

20 31. The storage medium according to claim 30,
wherein the first result information is output when a
device to be output as the first result information is
present, and

25 the second result information is output when the
device to be output as the first result information is
not present.

32. The storage medium according to claim 29,
wherein the computer program further comprises;

controlling symbol information corresponding to an
attribute which can be designated by the first

5 condition, and

to output the second result information and
information showing presence or absence of each

attribute designated by the first condition, presence
or absence of each attribute is shown in accordance

10 with a display mode of symbol information corresponding
to each attribute.

~~33.~~ A storage medium storing a computer program
to be executed by a computer of a device search system
15 for executing search of a device in accordance with a
search request from a client unit for requesting search
of a device on a network, wherein the computer program
comprises the steps of;

controlling a database in which information for
20 identifying a device on the network and information for
various attributes of the device,

receiving a first condition designating one or
more attributes in order to search a desired device on
the network from the client unit,

25 extracting a certain attribute from the first
condition and generating a second condition,

searching a device matching the first condition

from the database and generating first result
information, and

searching a device matching the second condition
from the database and generating second result
5 information.

34. The storage medium according to claim 33,
wherein

attributes of a device controlled by the database
10 include an indispensable attribute registered whenever
a device is registered in the database and attributes
other than the indispensable attribute, and

only the indispensable attribute is extracted from
attributes designed by the first condition when the
15 second condition is generated.

35. The storage medium according to claim 34,
wherein the computer program further comprises the step
of;

20 selecting the first result information or the
second result information in accordance with a
predetermined condition and returning the information
to the client unit.

25 36. The storage medium according to claim 35,
wherein

the first result information is returned to the

client unit when a device to be output as the first
result information is present, and

the second result information is returned to the
client unit when the device to be output as the first
5 result information is not present.

ABSTRACT OF THE DISCLOSURE

According to the present invention, a search condition can be moderated to easily understand a desired device without performing re-search, even if
5 there is no device completely matching the search condition. An attribute of an object class is extracted out of the search condition designated by an operator to search a device meeting the attribute. A matching state of each attribute of the search
10 condition first designated by the operator for a result obtained from the above search is visibly displayed.

FIG. 1

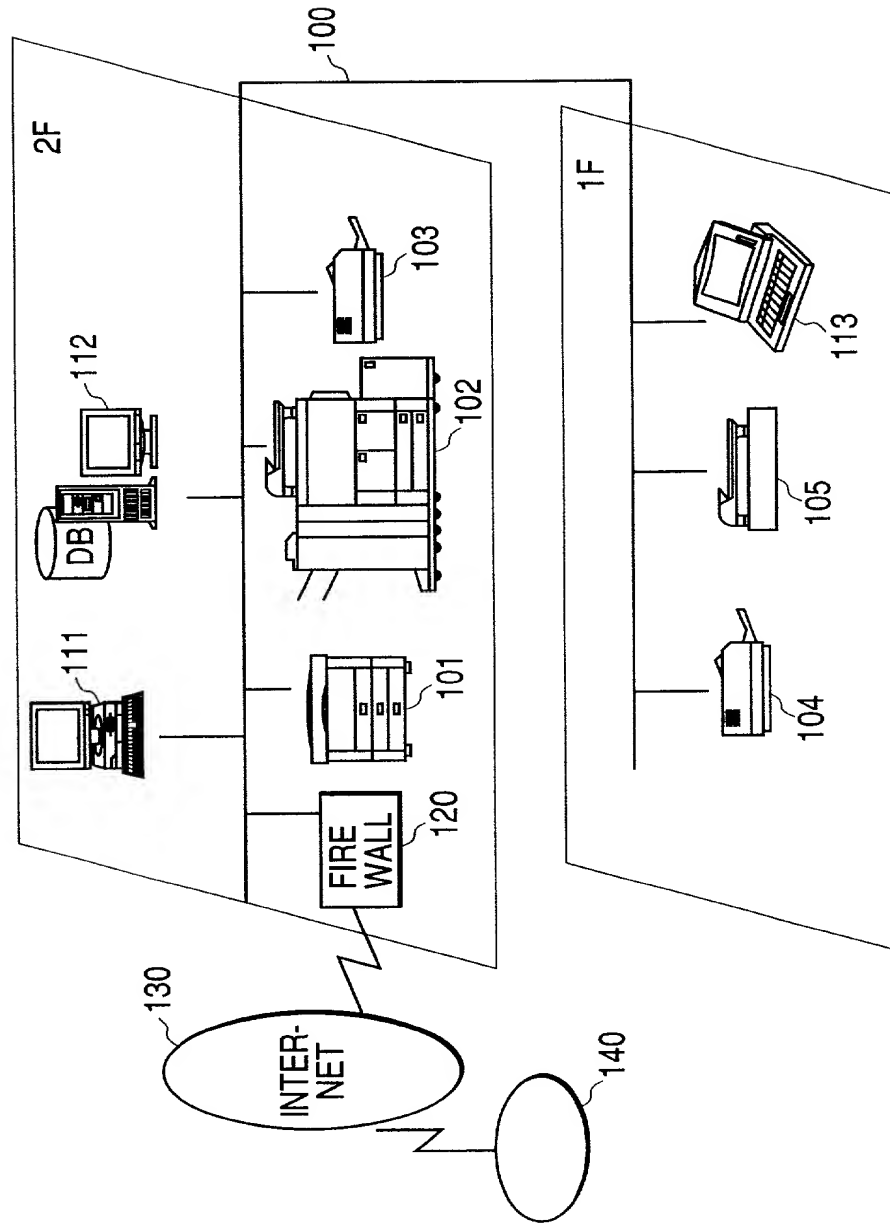


FIG. 2

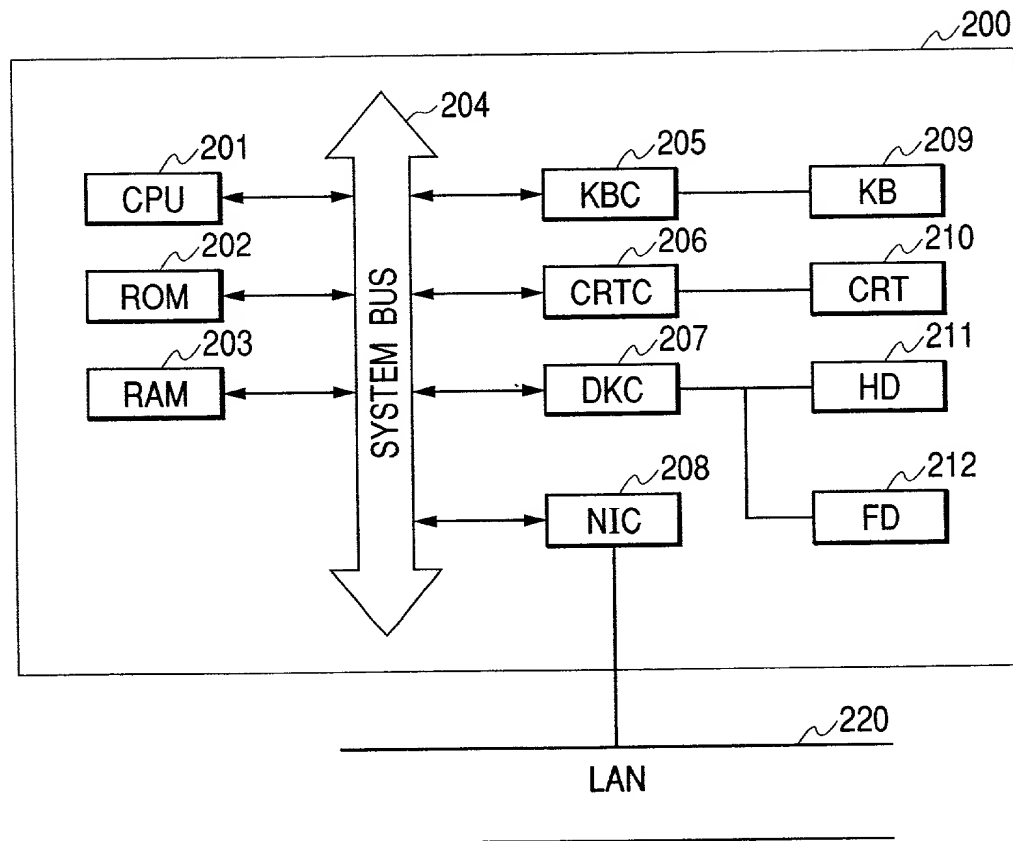


FIG. 3

301 DEVICE NAME	302 NETWORK ADDRESS	303 OBJECT CLASS	304 DEVICE TYPE	305 COLOR PRINT	306 DOUBLE-SIDED PRINT	307 STAPLE	...
Mr. COLOR	192.168.16.131	printer	printer	1	0	1	...
SECOND FLOOR HIGH SPEED MACHINE	192.168.16.132	printer	MPF	0	1	1	...
DEVELOPMENT ROOM PRINTER	192.168.16.155	printer	printer	0	0	1	...
FIRST FLOOR PRINTER	192.168.16.156	printer	printer	0	1	0	...
SCAN	192.168.16.32	scanner	scanner	NA	NA	NA	...
...

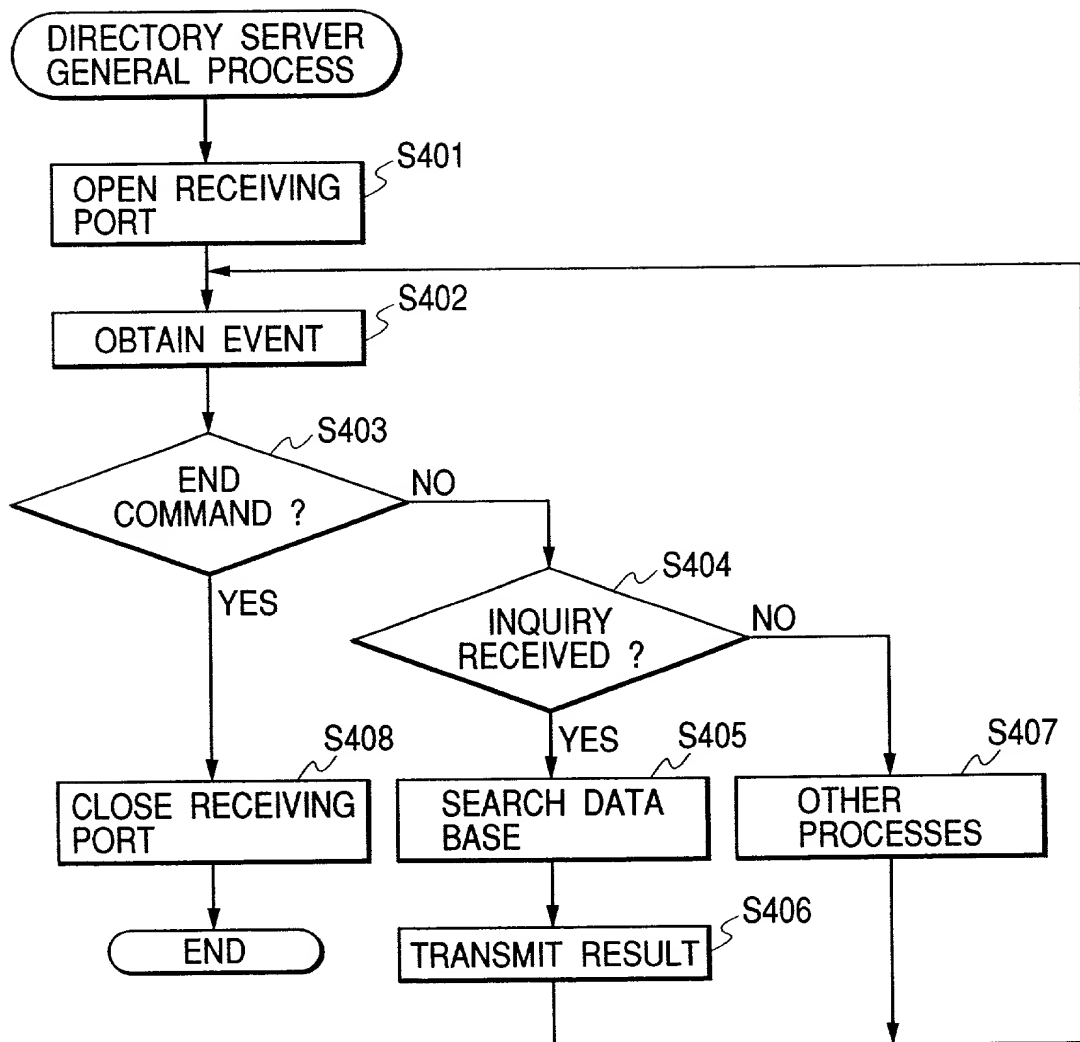
FIG. 4

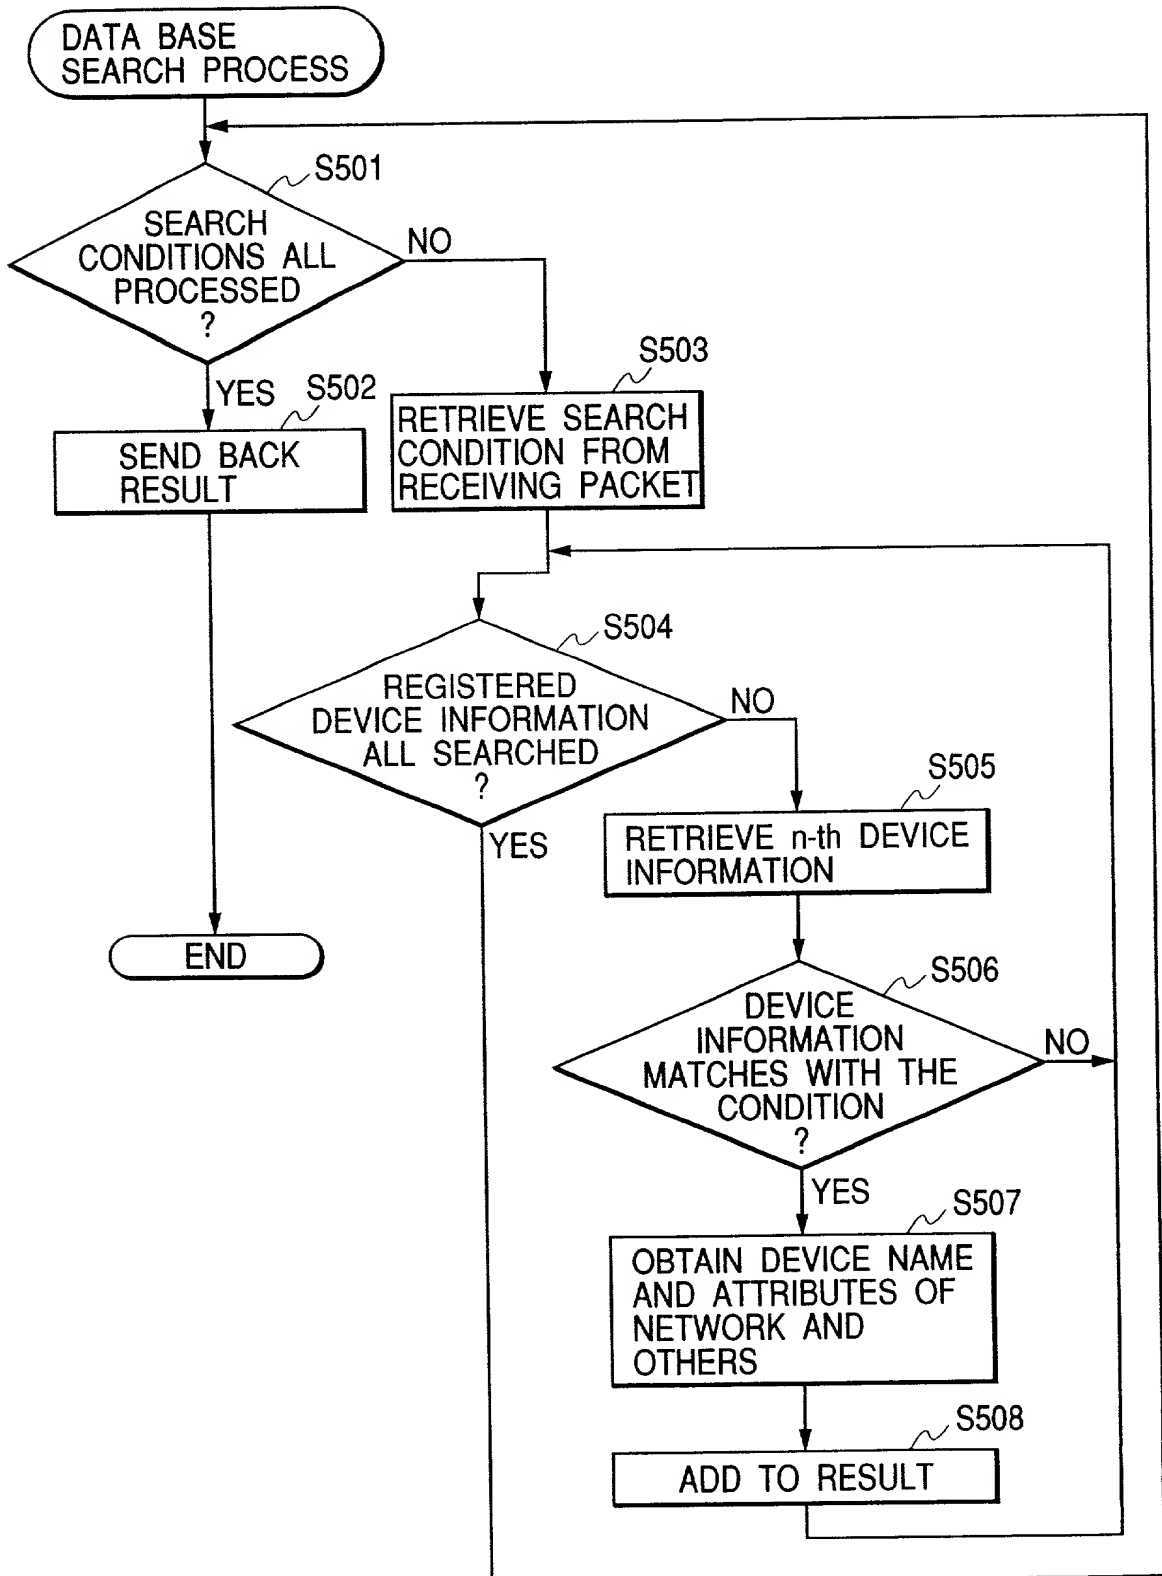
FIG. 5

FIG. 6

601

602

600

CLASS

PRINTER

▼

SEARCH

603

603d

603c

603b

603a

NAME

IP ADDRESS

■

COLOR

■

STAPLE

■

DOUBLE-SIDED PRINT

□

SORTER

604a

604b

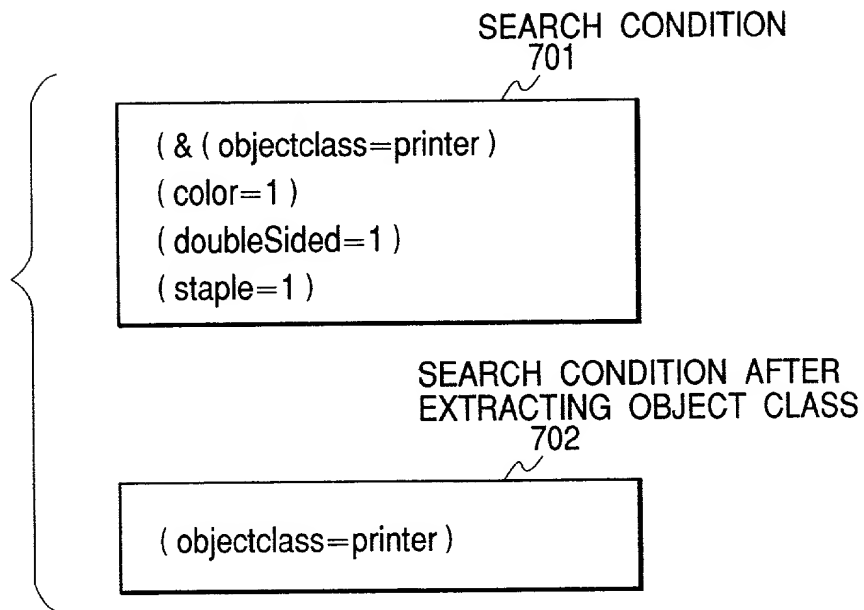
604c

604d

604e

604f

604

FIG. 7**FIG. 8**

SEARCH RESULT	801	802	803	804	805	806
DEVICE NAME	NETWORK ADDRESS	DEVICE TYPE	COLOR PRINT	DOUBLE- SIDED PRINT	STAPLE	
Mr. COLOR	192.168.16.131	printer	1	0	1	
SECOND FLOOR HIGH SPEED MACHINE	192.168.16.132	MPF	0	1	1	
DEVELOPMENT ROOM PRINTER	192.168.16.155	printer	0	0	1	
FIRST FLOOR PRINTER	192.168.16.156	printer	0	1	0	

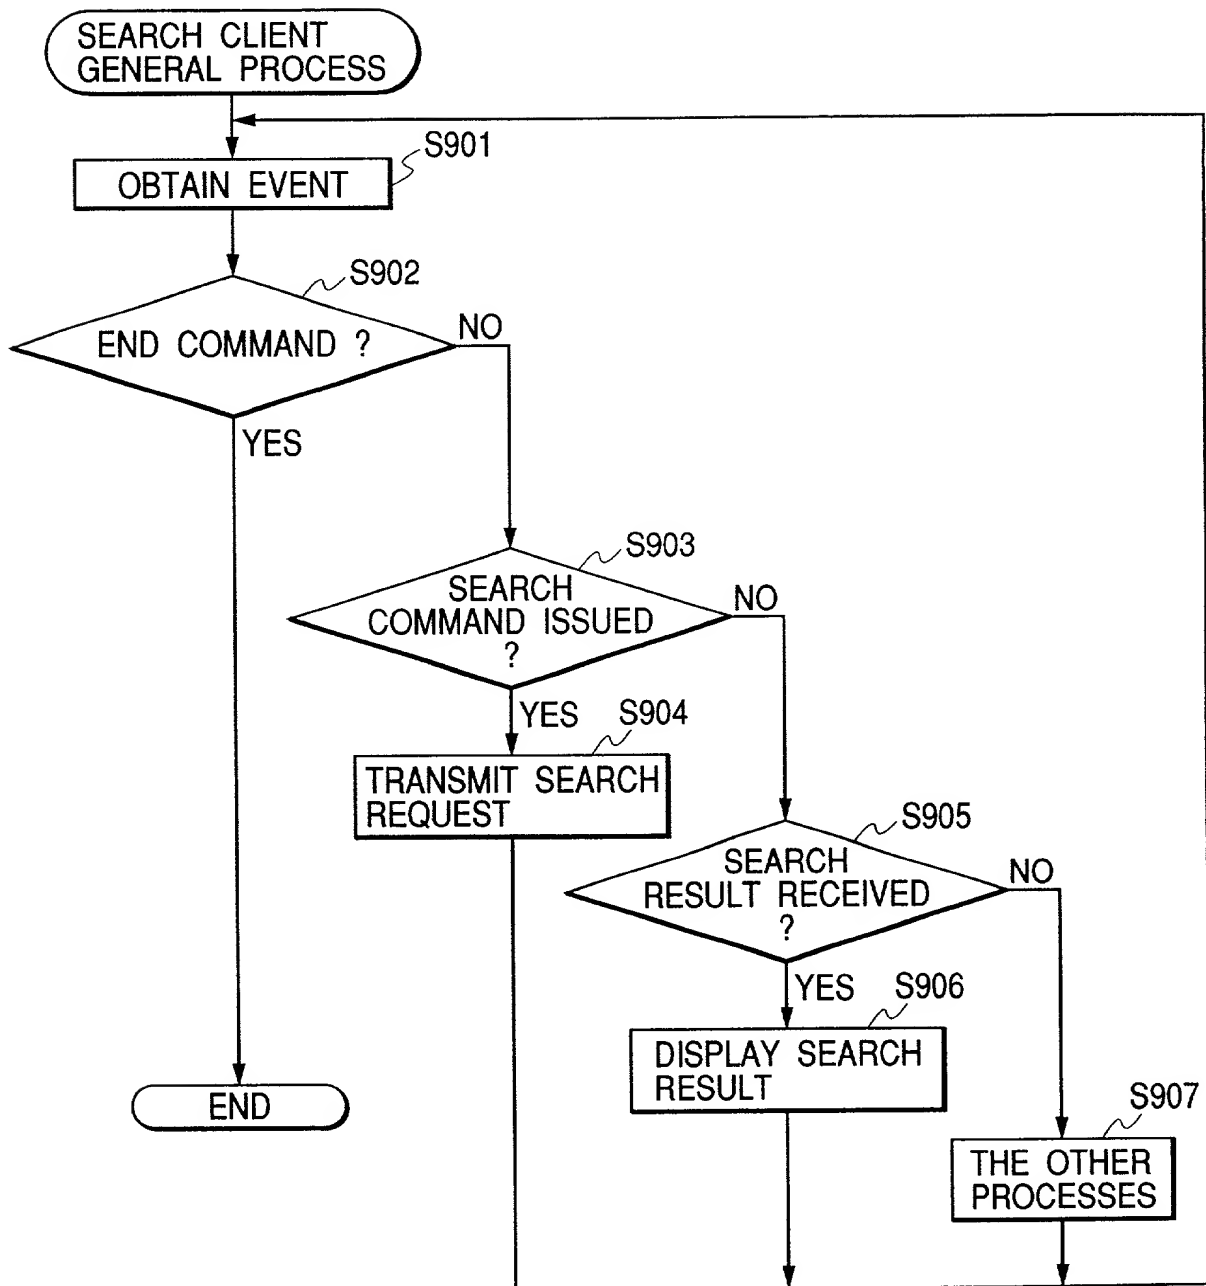
FIG. 9

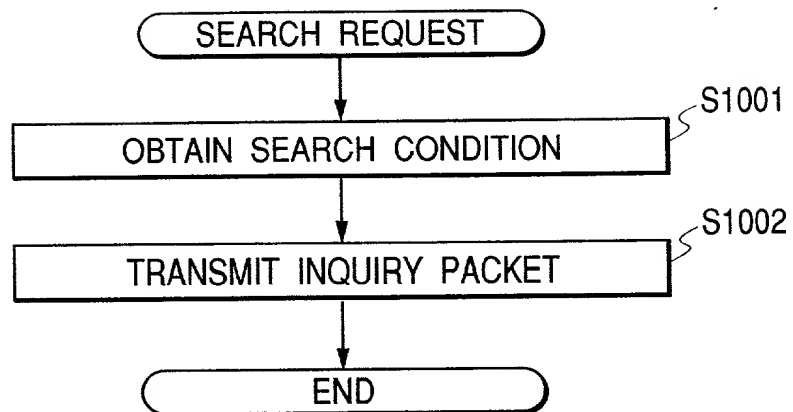
FIG. 10

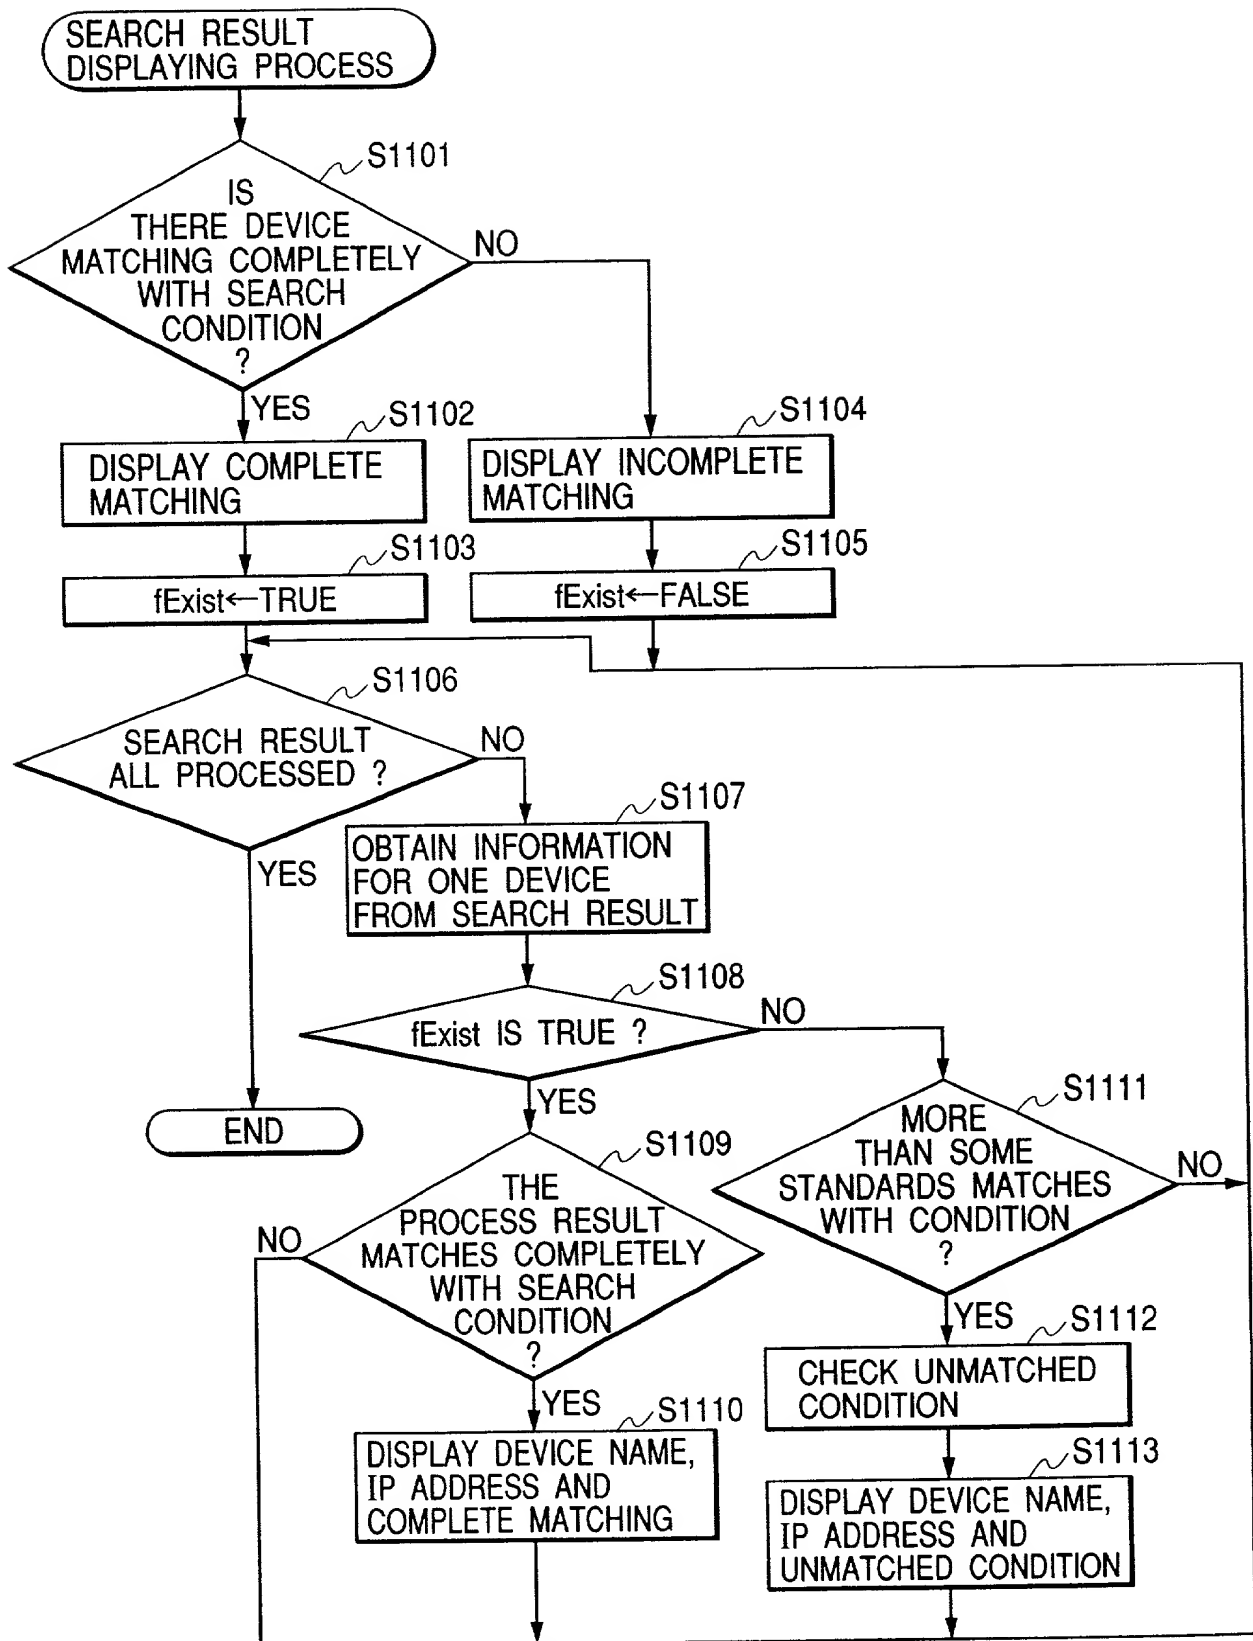
FIG. 11

FIG. 12

600

601 602 603

CLASS

NAME	IP ADDRESS	<input checked="" type="checkbox"/> COLOR	<input checked="" type="checkbox"/> STAPLE	<input checked="" type="checkbox"/> DOUBLE-SIDED PRINT	<input type="checkbox"/> SORTER
Mr. COLOR	192.168.16.131	<input type="radio"/>	<input type="radio"/>	-	
SECOND FLOOR HIGH SPEED MACHINE	192.168.16.132	-	<input type="radio"/>	<input type="radio"/>	
DEVELOPMENT ROOM PRINTER	192.168.16.155	-	<input type="radio"/>	-	
FIRST FLOOR PRINTER	192.168.16.156	-	-	<input type="radio"/>	

604a 604b 604c 604d 604e 604f

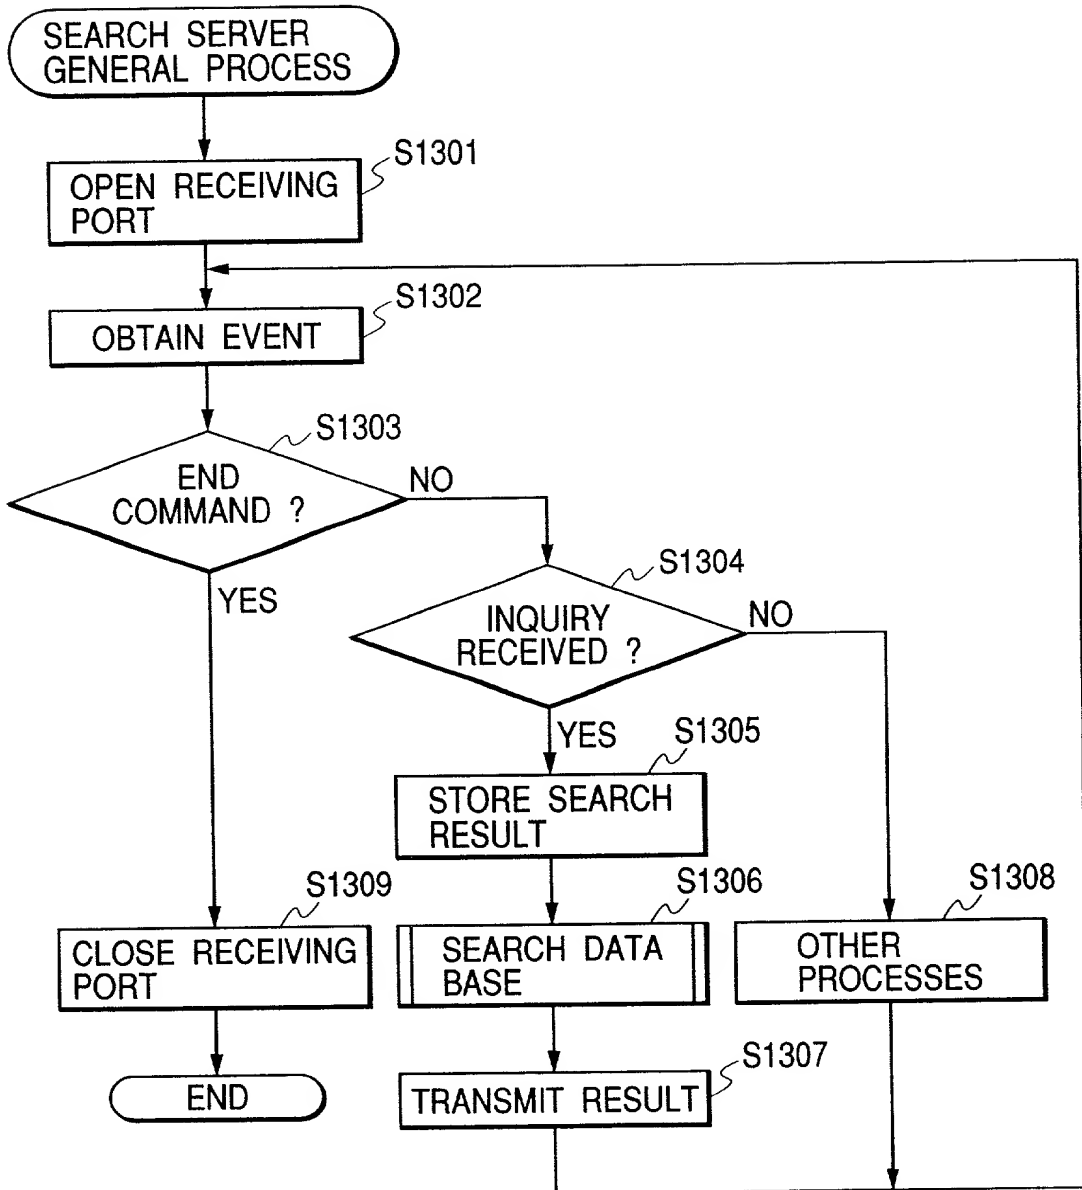
FIG. 13

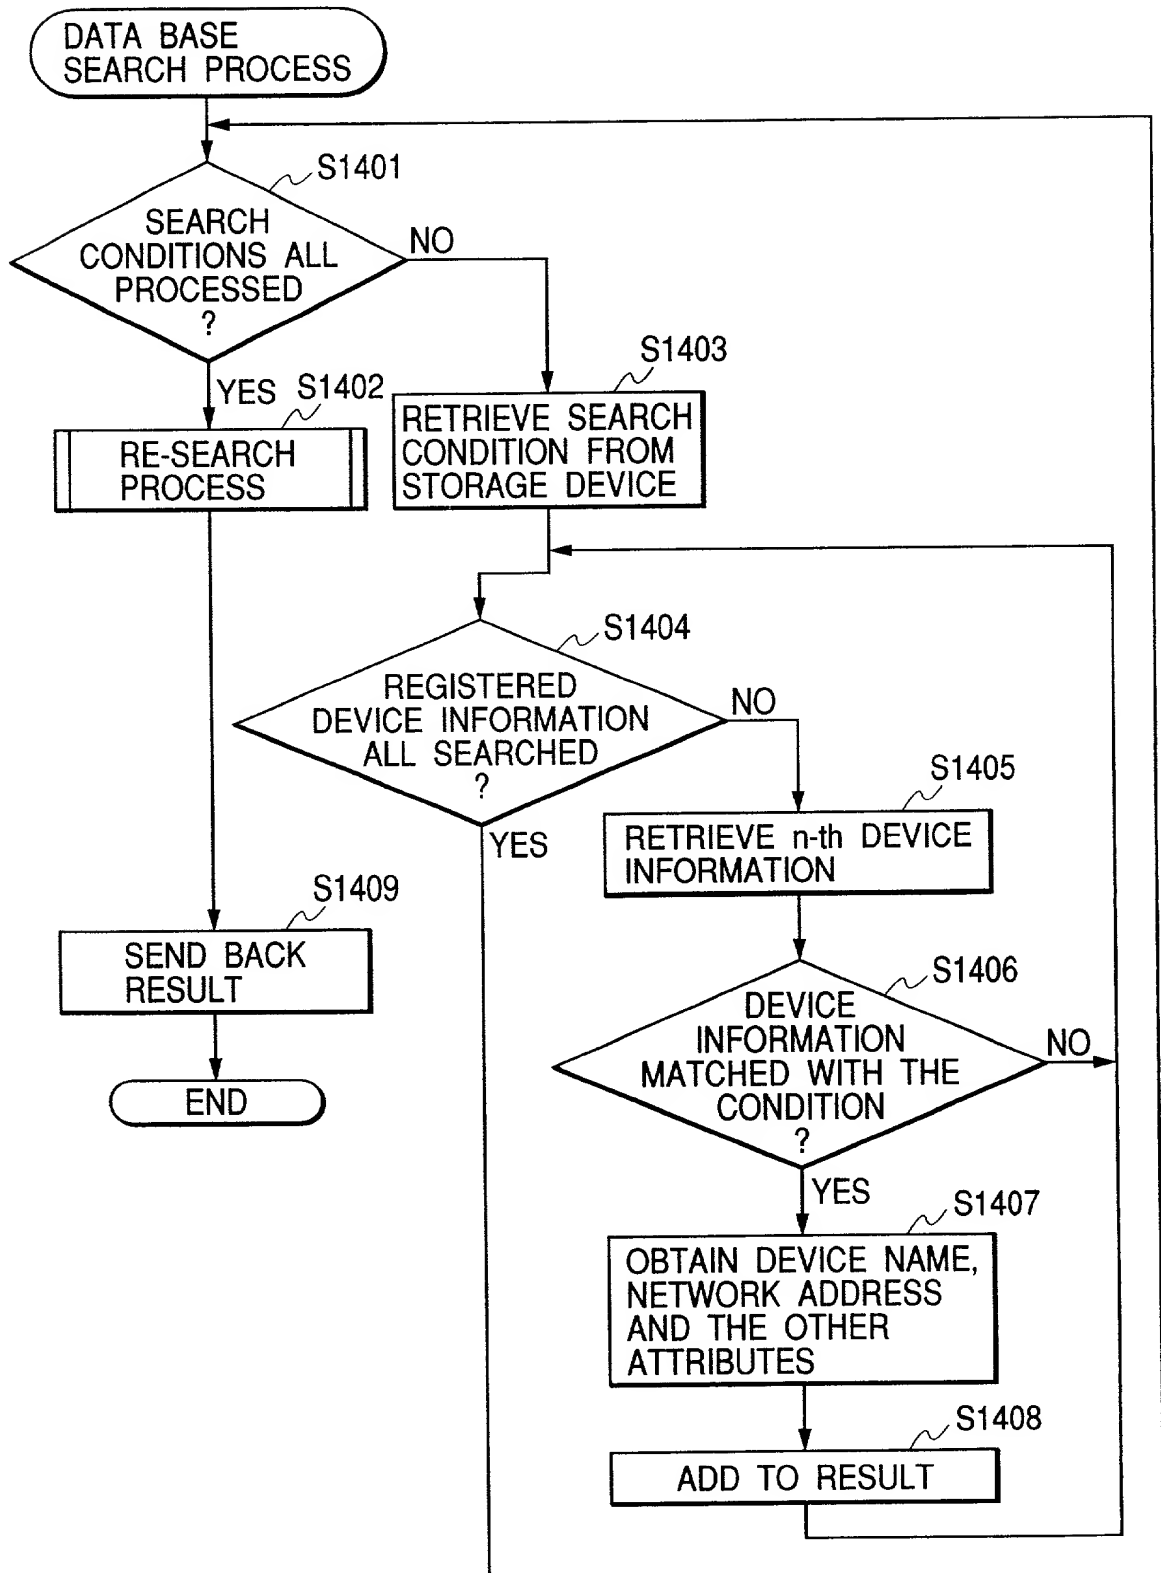
FIG. 14

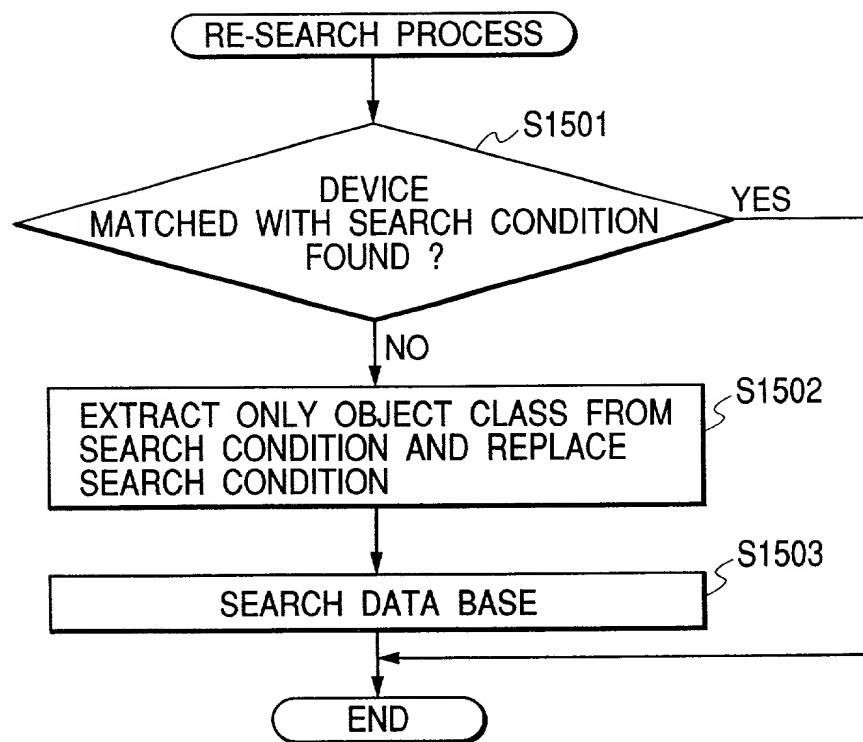
FIG. 15

FIG. 16

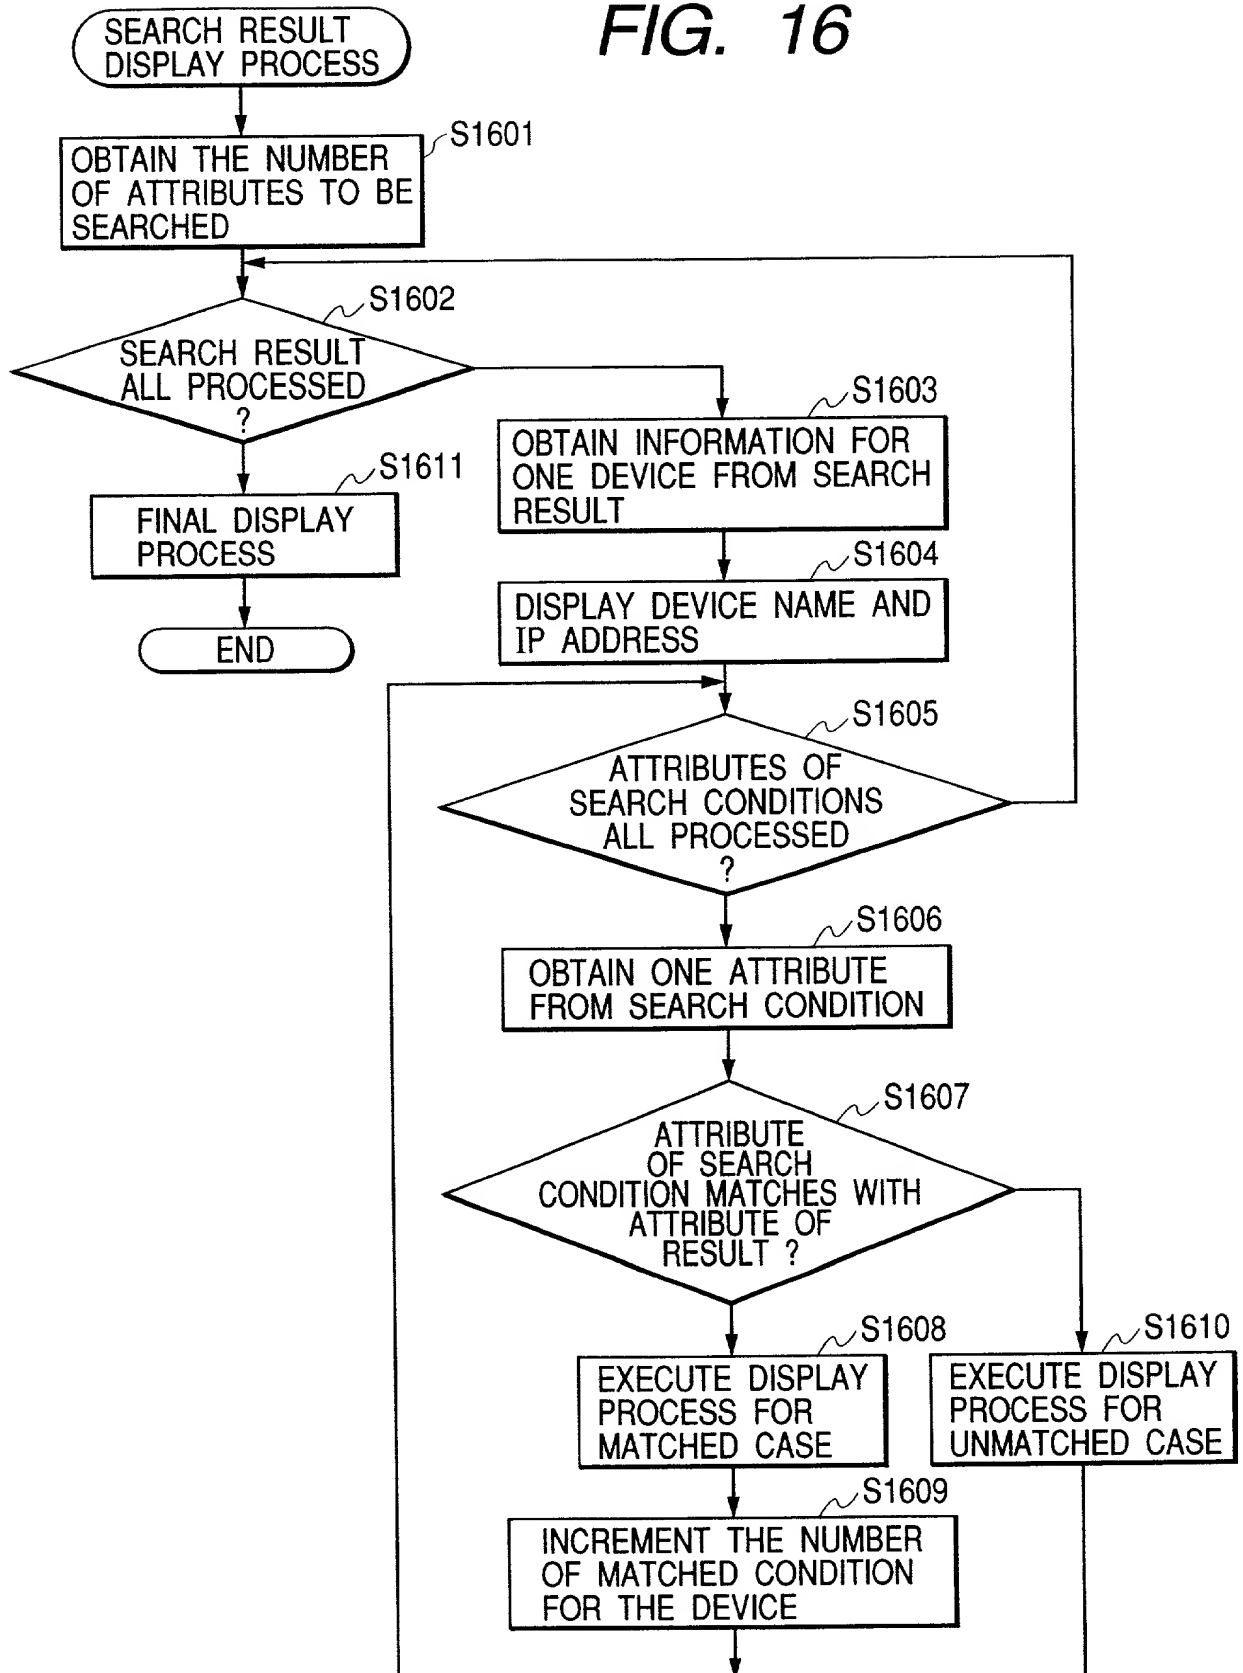


FIG. 17

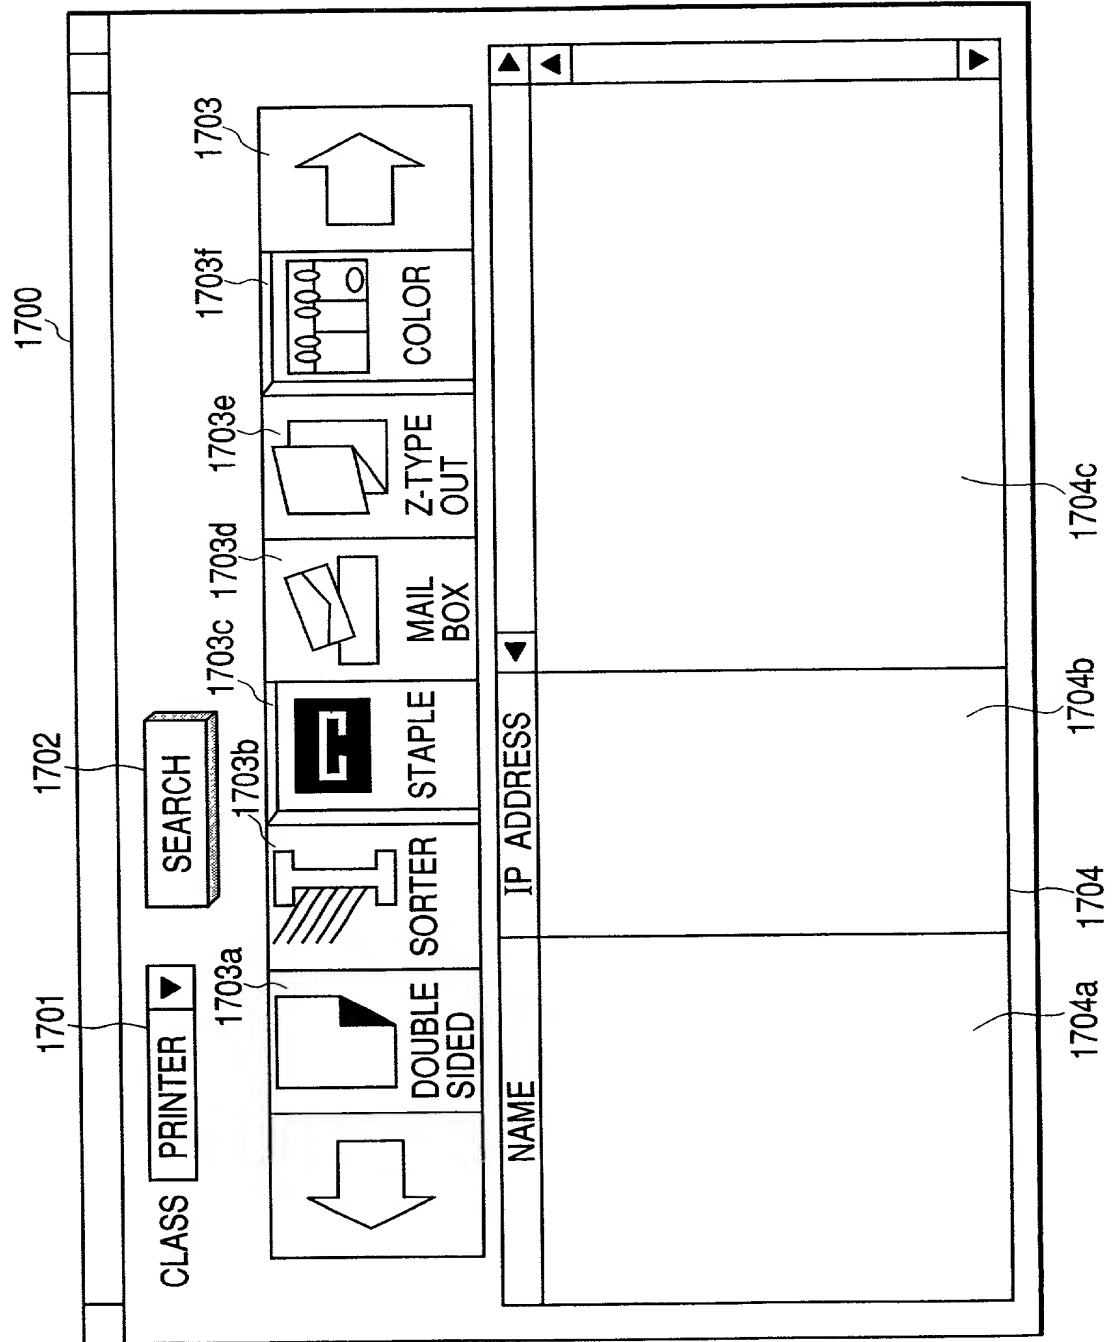


FIG. 18

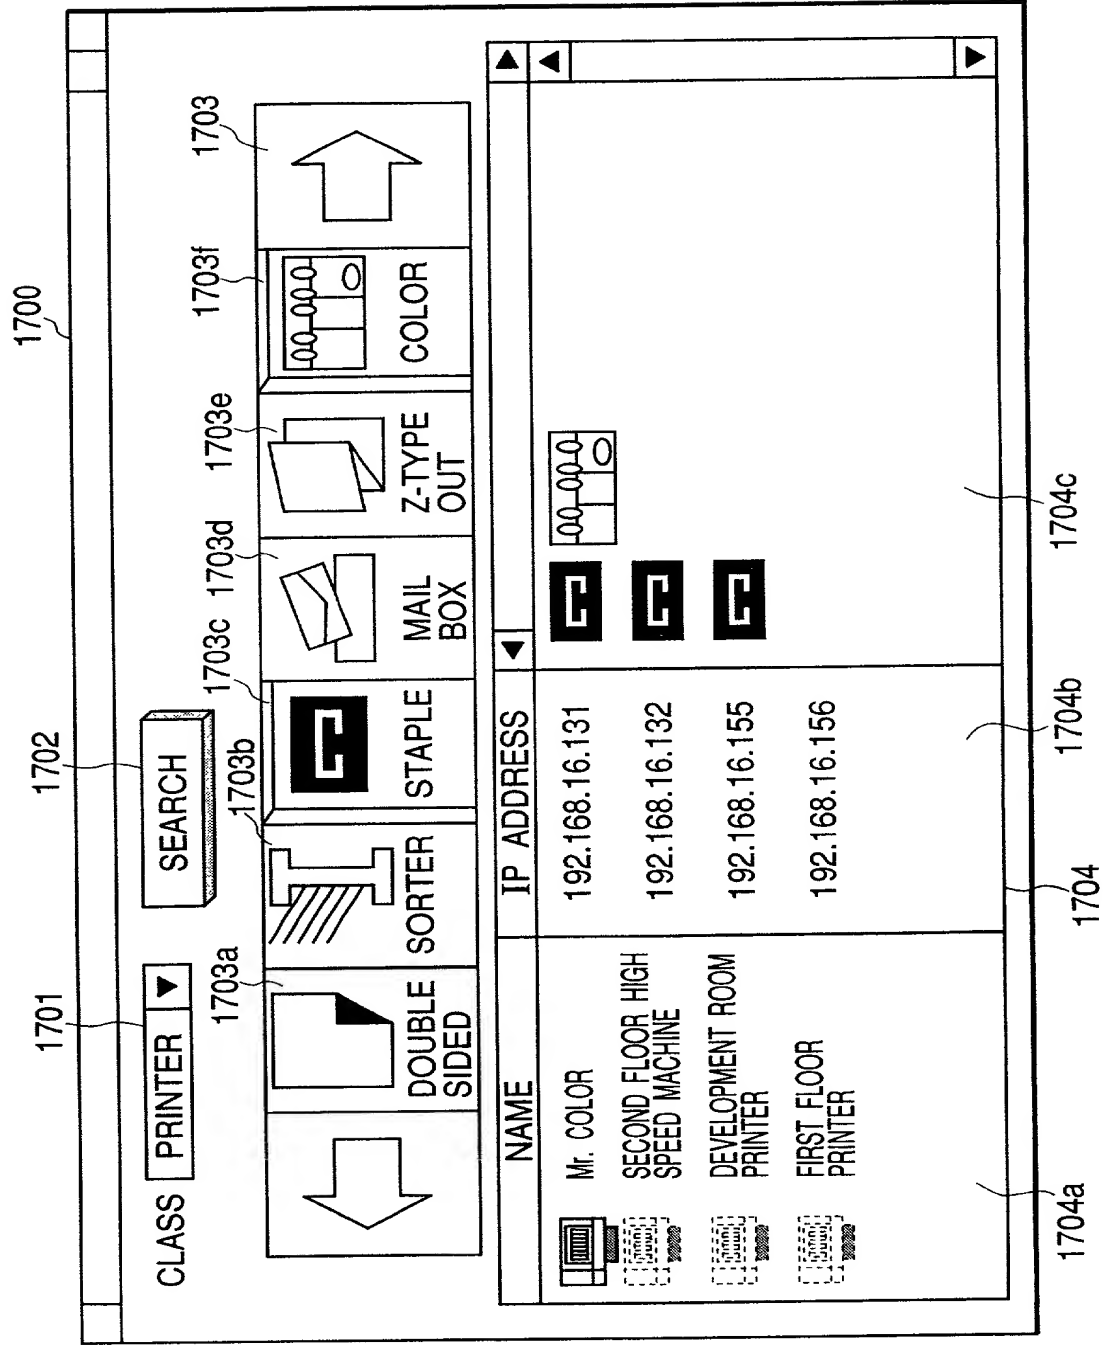


FIG. 19









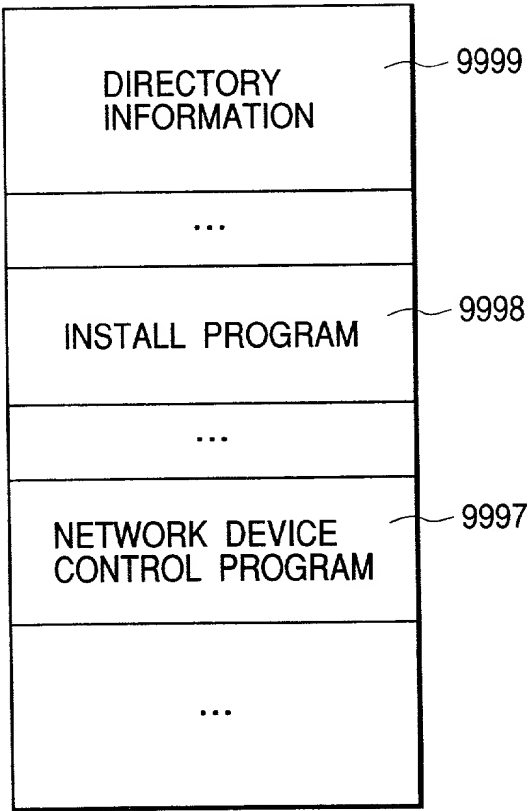
PRINTER FIXED		1901
DOUBLE SIDED		1902
STAPLE		1903
SORTER		1904
MAIL BOX		1905
Z-TYPE OUT		1906
COLOR		1907
PRINTER NOT FIX		1908

FIG. 20



CFO 14438 us

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION**

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled DEVICE SEARCH SYSTEM

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	11-119624	27 April 1999	Yes
Japan	11-151901	31 May 1999	Yes
Japan	11-264450	17 September 1999	Yes

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor MASATO OCHIAI

Inventor's signature Masato Ochiai
Date April 5, 2000 Citizen/Subject of Japan
Residence 2115-18, Shinbashi-cho, Izumi-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any YOSHITO MAEKAWA

Second Inventor's signature Yoshito Maekawa
Date April 6, 2000 Citizen/Subject of Japan
Residence 10-A-314, Komaoka 1-chome, Tsurumi-ku, Yokohama-shi,
Kanagawa-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 2)

CF0 14438 48

Full Name of Third Joint Inventor, if any NOBORU HAMADA
Third Inventor's signature Noboru Hamada
Date April 6, 2000 Citizen/Subject of Japan
Residence 28-1-401, Kamikodanaka 2-chome, Nakahara-ku, Kawasaki-shi,
Kanagawa-ken, Japan
Post Office Address c/o Canon Kabushiki Kaisha
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan

Full Name of Fourth Joint Inventor, if any _____
Fourth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Fifth Joint Inventor, if any _____
Fifth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Sixth Joint Inventor, if any _____
Sixth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Seventh Joint Inventor, if any _____
Seventh Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____

Full Name of Eighth Joint Inventor, if any _____
Eighth Inventor's signature _____
Date _____ Citizen/Subject of _____
Residence _____
Post Office Address _____